IRONCRAFT



AGRICULTURE

PRODUCT GUIDE REVISED FEBRUARY 11, 2025

ROTARY CUTTERS 3

Single Spindle Rotary Cutters 3

Dual/Multi Spindle Rotary Cutters 8

Flex-Wing Rotary Cutters 10

MOWERS 18

Flail Mowers 18

Finishing Mowers 21

LANDSCAPING 24

Box Blades 24

Dual Edge Graders 26

Grader Blades 28

Landscape Rakes 32

TILLAGE 33

Tillers 33

Harrows 38

Moldboard Plows 41

Aerators 42

MATERIAL HANDLING 44

Boom Poles 44

Bale Unroller 45

CONSTRUCTION & MISCELLANEOUS 46

Post Hole Diggers 46

Quick Hitches 47

Spreaders 48

Auxiliary Hydraulic Kit 49

SKIDSTEER/FRONT END LOADER 50

Buckets 50

Grapples 55

Grapple Rakes 59

Hay Equipment 61

Manure Forks 66

Pallet Forks 67

Conversions 70

Snow Equipment 71

Quick Attach Plates 73

Tree Equipment 74

Brush Cutters 76

SNOWEQUIPMENT 77

Snow Cannon 77

1200 SERIES
STANDARD-DUTY CUTTERS

IronCraft's 1200 series rotary cutters are a great choice for tractors ranging in PTO horsepower from 15 to 65. These single spindle rotary cutters are available in widths of 48", 60", and 72". They are designed to cut grass, weeds, and light brush up to 1-1/2" in diameter and are available in five different color choices.


COLOR OPTIONS







	1204	1205	1206
PTO HORSEPOWER	15-45 HP	20-45 HP	30-65 HP
CUTTING CAPACITY	1-1/2"		
CUTTING HEIGHT	2" MIN.		
CUTTING WIDTH	48"	60"	72"
OVERALL WIDTH	51"	63 "	75"
APPROXIMATE WEIGHT	540 LBS	600 LBS	730 LBS
GEARBOX RATING (HP)	55 HP		
INPUT PTO	SERIES 4		
DRIVELINE PROTECTION	SHEAR PIN OR SLIP CLUTCH		
HITCH	CAT 1		
QH COMPATIBLE	YES		
DECK THICKNESS	11 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	10,000 FPM	12,500 FPM	15,000 FPM
BLADE CARRIER	PAN		
NUMBER OF TAILWHEELS	1		
HUB	GREASEABLE		
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		

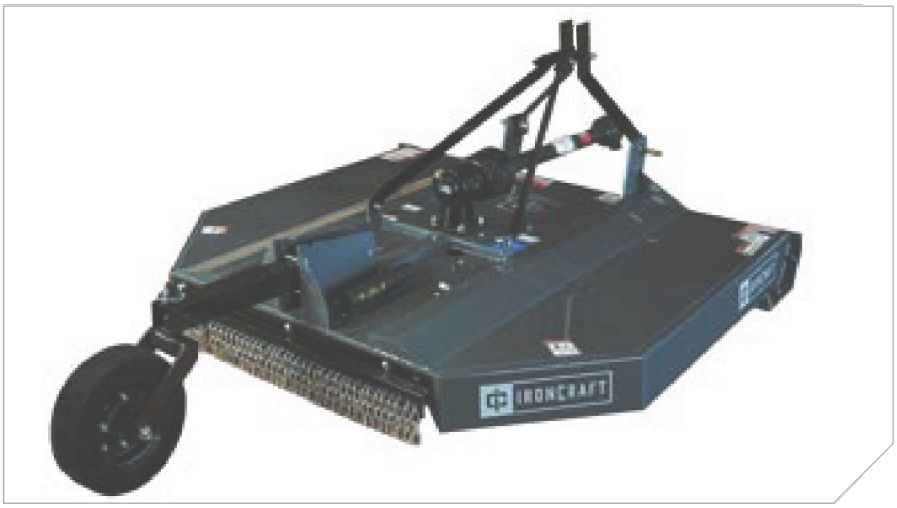





300 SERIES
MEDIUM-DUTY SMOOTH-TOP CUTTERS


IronCraft's 300 series smooth-top rotary cutter is great for clearing grass and brush up to 2" in diameter. It is designed for tractors with 32 -90 PTO Horsepower and comes standard with a slip clutch and your choice of 5 different colors.

COLOR OPTIONS



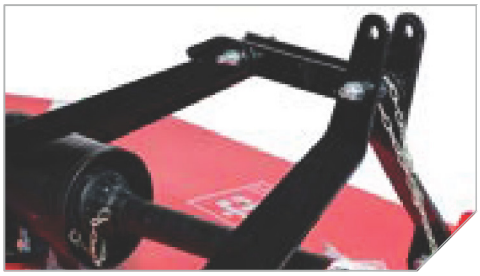

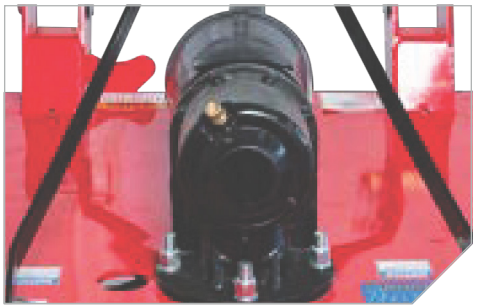

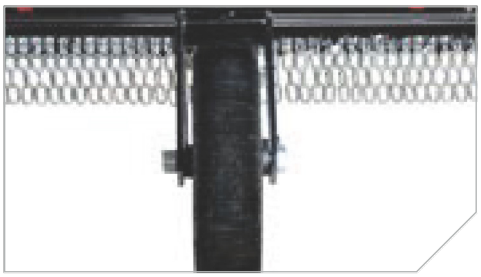



	305	306 1-TW	306 2-TW
PTO HORSEPOWER	32 - 90 HP	45 - 90 HP	47 - 90 HP
CUTTING CAPACITY	2"	2"	2"
CUTTING HEIGHT	2" MINIMUM		
CUTTING WIDTH	60"	72"	72"
APPROXIMATE WEIGHT	640 LBS	740 LBS	740 LBS
GEARBOX RATING (HP)	100 HP		
INPUT PTO	SERIES 4		
DRIVELINE PROTECTION	SLIP CLUTCH		
HITCH	CAT 1		
QH COMPATIBLE	YES		
DECK THICKNESS	10 GA		
SIDE BANDS	8-1/2"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	13,000 FPM	14,500 FPM	
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1	1	2
HUB	GREASEABLE		
WHEEL TYPE	15" LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		




1500 SERIES
ROUNDBACK CUTTERS

Ironcraft's heavy-duty 1500 series cutter is designed to cutter material up to 3" in diameter. It is offered in 3 working widths and five colors. It comes standard with a slip-clutch to protect the gearbox and driveline from damage. Rubber belting or chains are optional.

COLOR OPTIONS






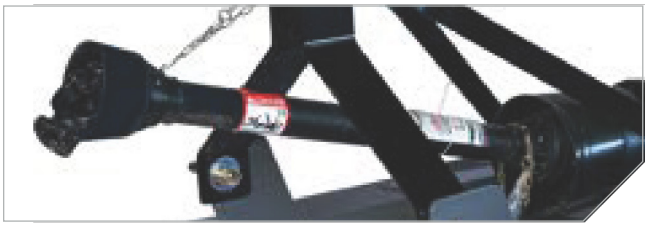




	1505 1506		1507
PTO HORSEPOWER	35 - 80 HP	40 - 80 HP	55 - 95 HP
CUTTING CAPACITY	2-1/2"		3"
CUTTING HEIGHT	2" MINIMUM		
CUTTING WIDTH	60"	72"	84"
APPROXIMATE WEIGHT	745 LBS	900 LBS	1305 LBS
GEARBOX RATING (HP)	100 HP	100 HP	150 HP
INPUT PTO	SERIES 4		SERIES 6
DRIVELINE PROTECTION	SLIP CLUTCH		
HITCH	CAT 1		CAT 2
QH COMPATIBLE	YES		YES-CAT 2
DECK THICKNESS	10 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3" UPLIFT		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	12,400 FPM	14,800 FPM	17,400 FPM
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1		
HUB	GREASEABLE		BEARING
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		



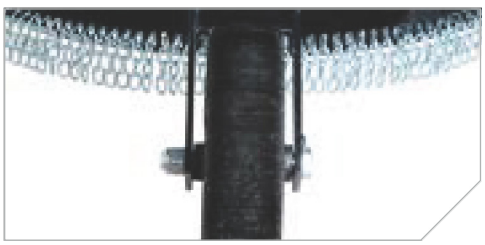

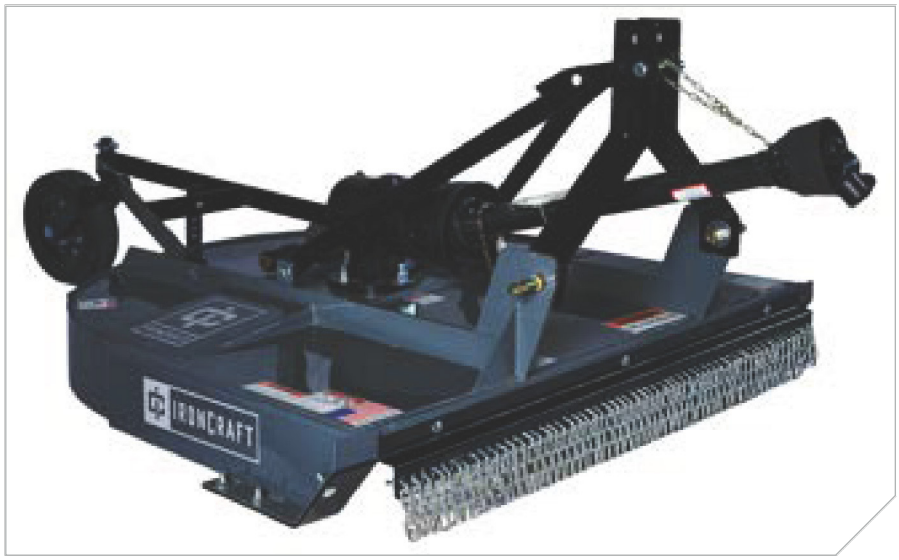


1600 SERIES
HEAVY-DUTY CUTTERS

Available in cutting widths of 72" or 84", the 1600 series cutter is a heavy-duty single spindle cutter and cut grass and brush up to 3" in diameter. With a choice of different colors you can match your cutter to your tractor.

COLOR OPTIONS




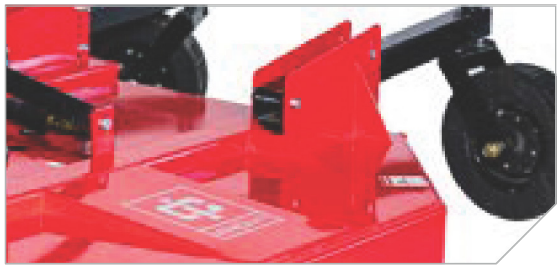





	1606	1607
PTO HORSEPOWER	47 - 100 HP	55 - 100 HP
CUTTING CAPACITY	3"	
CUTTING HEIGHT	2" MINIMUM	
CUTTING WIDTH	72"	84"
APPROXIMATE WEIGHT	1205 LBS	1375 LBS
GEARBOX RATING (HP)	100 HP	
INPUT PTO	SERIES 6	
DRIVELINE PROTECTION	SLIP CLUTCH	
HITCH	CAT 1/2	
QH COMPATIBLE	YES - CAT 2	
DECK THICKNESS	7 GA	
SIDE BANDS	8"	
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 4"	
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS	
BLADE TIP SPEED	16,800 FPM	
BLADE CARRIER	1/2" PLATE	5/8" PLATE
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	

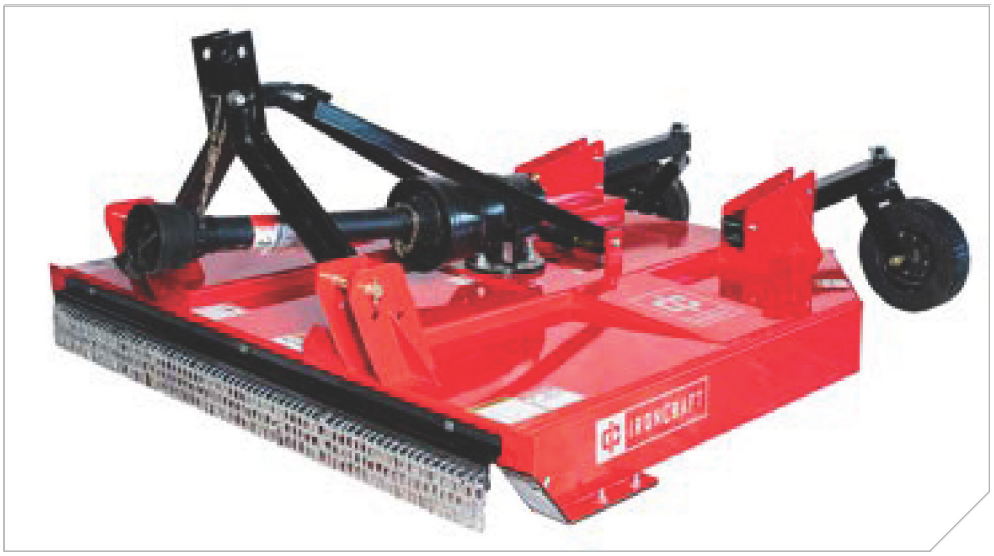


970 HEAVY-DUTY ROUNDBACK CUTTER

The robust 970 Roundback Rotary Cutter has an 84" cutting width. It works well with 60 horsepower and larger tractors. The 970 provides the cutting power to slash its way through heavy brush and small trees up to 4" diameter. The 970 is perfect for maintaining the farm or the roadside. The smooth top deck design prevents build-up of debris or other cuttings and makes cleanup fast and easy.

COLOR OPTIONS





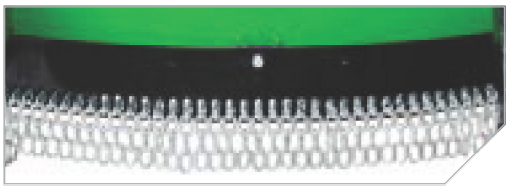





	970
PTO HORSEPOWER	60 HP MINIMUM
CUTTING CAPACITY	4"
CUTTING HEIGHT	1" MINIMUM
CUTTING WIDTH	84"
OVERALL WIDTH	90"
APPROXIMATE WEIGHT	1450 LBS
CENTER GEARBOX RATING	175 HP
INPUT PTO	SERIES 6
DRIVELINE PROTECTION	SLIP CLUTCH
HITCH	CAT 2
QUICK HITCH COMPATIBLE	YES
DECK THICKNESS	7 GA
SIDE BANDS	1/4" X 12"
SKID SHOES (STANDARD)	1/4" W/ REPLACEABLE LIP
BLADES	1/2" X 4"
GUARDING	CHAINS STANDARD
BLADE TIP SPEED	16,500 FPM
BLADE CARRIER	3/16" FORMED PLATE
NUMBER OF TAILWHEELS	2
HUB	BEARING
WHEEL TYPE	LAMINATED
GEARBOX WARRANTY	5 YEAR LIMITED



1800 SERIES

HEAVY-DUTY MULTI-SPINDLE CUTTERS


The 1800 series is IronCraft's heavy-duty dual spindle cutters. They are designed to work with tractors ranging in pto horsepower from 42 to 125 and cut material up to 3" in diameter. They are available with lift and pull type hitches as well as five different color choices.

COLOR OPTIONS







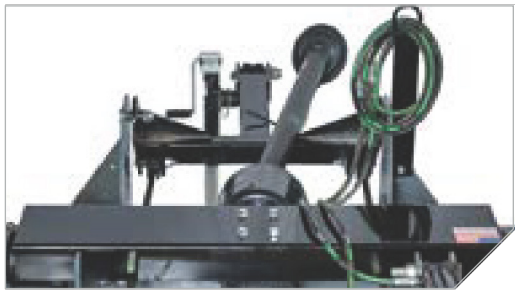

	1808	1810
PTO HORSEPOWER	42 HP MIN	52 HP MIN
CUTTING CAPACITY	3"	
CUTTING HEIGHT	2" TO 10"	
CUTTING WIDTH	96"	120"
OVERALL WIDTH	98"	122"
APPROXIMATE WEIGHT	1250 LBS	1480 LBS
CENTER GEARBOX RATING	125 HP	
OUTBOARD GEARBOX RATING	100 HP	
INPUT PTO	SERIES 5	
DRIVELINE PROTECTION	SLIP CLUTCH	
CENTER DRIVESHAFT	SHOCK COUPLER PROTECTED	
HITCH	CAT 1 & 2	

	1808	1810
DECK THICKNESS	10 GA	7 GA
SIDE BANDS	8"	
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 3" UPLIFT	
GUARDING	OPTIONAL CHAINS	
BLADE TIP SPEED	17,100 FPM	15,235 FPM
BLADE CARRIER	1/2" PLATE	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	

2400 SERIES
HEAVY-DUTY MULTI-SPINDLE CUTTERS

The 2400 series is IronCraft's heavy-duty dual spindle cutters. They are designed to work with tractors ranging in pto horsepower from 42 to 125 and cut material up to 3" in diameter. They are available with lift and pull type hitches as well as ive different color choices.



COLOR OPTIONS









	2408	2410
PTO HORSEPOWER	42 HP MIN	52 HP MIN
CUTTING CAPACITY	3"	
CUTTING HEIGHT	3-1/2" TO 10"	
CUTTING WIDTH	96"	120"
OVERALL WIDTH	98"	122"
APPROXIMATE WEIGHT	Lift-1450lbs / Pull-1600 lbs	Lift-1585lbs / Pull-1680 lbs
CENTER GEARBOX RATING	125 HP	
OUTBOARD GEARBOX RATING	75 HP	
INPUT PTO	SERIES 5	
DRIVELINE PROTECTION	SLIP CLUTCH	
CENTER DRIVESHAFT	SHOCK COUPLER PROTECTED	
HITCH	CAT 1 & 2	


	2408	2410
DECK THICKNESS	10 GA	10 GA
SIDE BANDS	11"	
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 4" UPLIFT	
GUARDING	OPTIONAL CHAINS	
BLADE TIP SPEED	16,700 FPM	17,300 FPM
BLADE CARRIER	3/16" Formed Plate w/ 3/4" x 2" Blade Bar	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	

2510 SERIES
10' FLEX-WING CUTTER

WATCH IT IN ACTION

PRODUCT HIGHLIGHTS

Made in the U.S.A.
WITH U.S. & IMPORTED PARTS

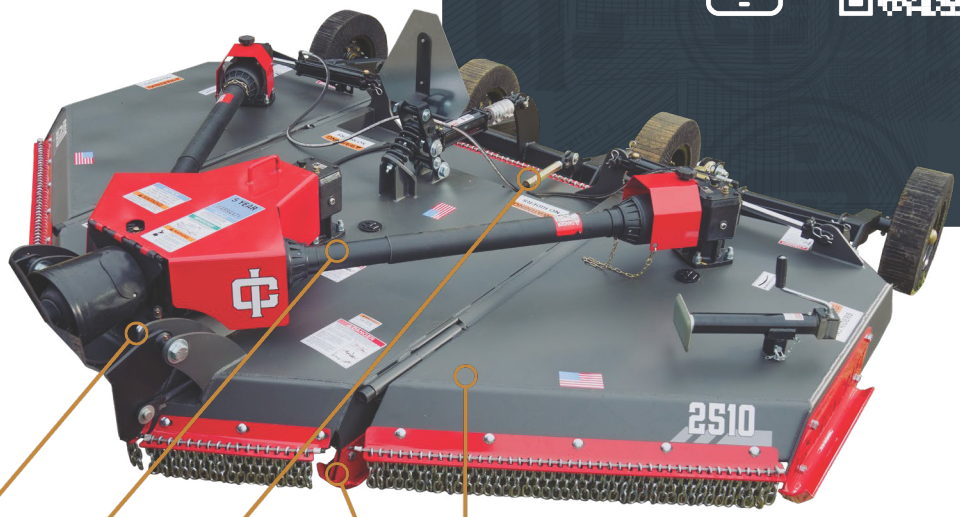

- NARROW TRANSPORT WIDTH
- GREASABLE DRIVE LINES
- DOUBLE INTERNAL LEVELING RODS FOR EASY ADJUSTMENTS
- FLAT TOP DESIGN FOR EASY CLEANING & MAINTENANCE
- REPLACEABLE, HEAVY-DUTY CENTER & WING DECK SKID SHOES

AVAILABLE COLORS:

	2510
RPM	540
HP REQUIRED	25- 60 PTO
WORKING WIDTH	123"
OVERALL WIDTH	132"
TRANSPORT WIDTH	96.5"
TONGUE WEIGHT	830 lbs
WEIGHT	2400 lbs with 4-20" Laminated Tires
CUTTING HEIGHT	1-3/4" to 11-1/2"
CUTTING CAPACITY	2"
DECK THICKNESS	11 GA
SIDE BANDS	7 GA x 11"
SUSPENSION	1 Medium Duty Spring in Center Tailwheel Assembly
SKID SHOES	Replaceable
PTO DRIVE SHAFT	ASAE CAT 5
WING DRIVE PTO	ASAE CAT 4
DRIVELINE PROTECTION	Slip Clutch
BLADE HOLDER	Round Stump Jumper
GEARBOX RATING	175 HP

1 Year WARRANTY PROMISE

OUTBOARD GEARBOX RATING	75 HP
WING FLEX	20 Degrees Down to 85 Degrees Up
BLADES	1/2" x 3" Uplift
HITCH TYPE	Swivel Pivot Self Leveling
GEARBOX WARRANTY	5 year limited
BLADE OVERLAP	5-1/4"
SAFETY TOW CHAIN	Standard
GUARDING OPTIONS	Single Row Chains Standard
WHEEL TYPE	20" Laminated
BLADE TIP SPEED	14,600 FPM



2512 SERIES
12' FLEX-WING CUTTERS

If you are looking for a Flex-Wing Rotary Cutter for your compact tractor, the IronCraft 2512 is the choice for you. With its smooth top deck and spring suspension, this flex-wing is designed to cut grass, weeds, and light brush up to 2” in material while only requiring a minimum PTO horsepower of 35 and one hydraulic outlet. With five different color choices you are able to match your cutter to your tractor.


COLOR OPTIONS





	2512
PTO HORSEPOWER	"35 PTO HP MINIMUM (GEAR DRIVE TRANSMISSION)"
CUTTING WIDTH	144"
OVERALL WIDTH	151"
OVERALL LENGTH W/ WHEEL	158"
TRANSPORT WIDTH	89-3/4"
TRANSPORT HEIGHT	68"
CUTTING CAPACITY	UP TO 2"
CUTTING HEIGHT	1-1/2" TO 12"
APPROXIMATE WEIGHT	2,630 LBS W/4-20" LAMINATED TIRES
APPROXIMATE TONGUE WEIGHT	760 LBS
BLADE TIP SPEED	15,650 FPM
BLADES	1/2" X 3" W/ LIFT
OUTBOARD GEARBOXES	75 HP
SPLITTER GEARBOX	175 HP
GEARBOX RPM	540 RPM
GEARBOX OIL	85W-140 (FACTORY FILLED)
OUTPUT SHAFT DIAMETER	2"
INPUT PTO	ASAE CAT 5 CV
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH

HITCH	SWIVEL CLEVIS
DECK THICKNESS	10 GA
SIDE SKIRT MATERIAL	3/16"
HEIGHT ADJUSTMENT	HYD. CYLINDER
WING ADJUSTMENTS	TURNBUCKLE
SUSPENSION	SINGLE SPRING
WING FLEX	22 DEGREES DOWN TO 87 DEGREES UP
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP
WING CYLINDERS	SINGLE ACTING STD
SKID SHOES (STANDARD)	REPLACEABLE
SAFETY DEFLECTORS	SINGLE ROW CHAINS
TOW CHAINS	STANDARD
BLADE OVERLAP	6"
BLADE CARRIER	ROUND STUMP JUMPER
WHEELS & TIRES	4-20” laminated Std (4-20” aircraft optional)
DECK RINGS	N/A
LIGHT KIT	N/A
GEARBOX WARRANTY	5 YEAR LIMITED



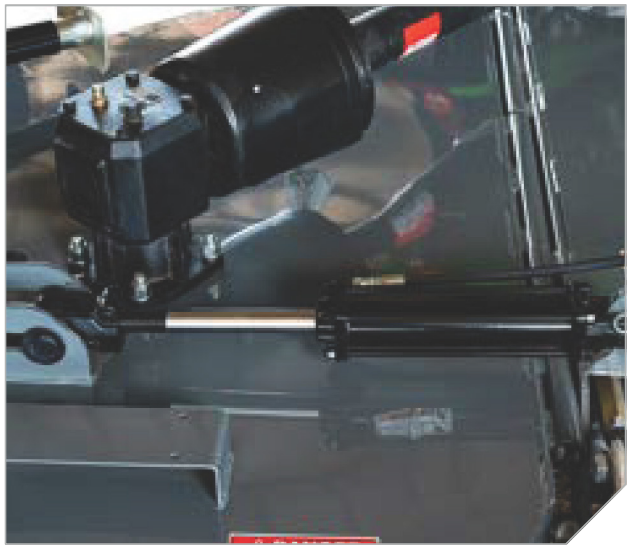

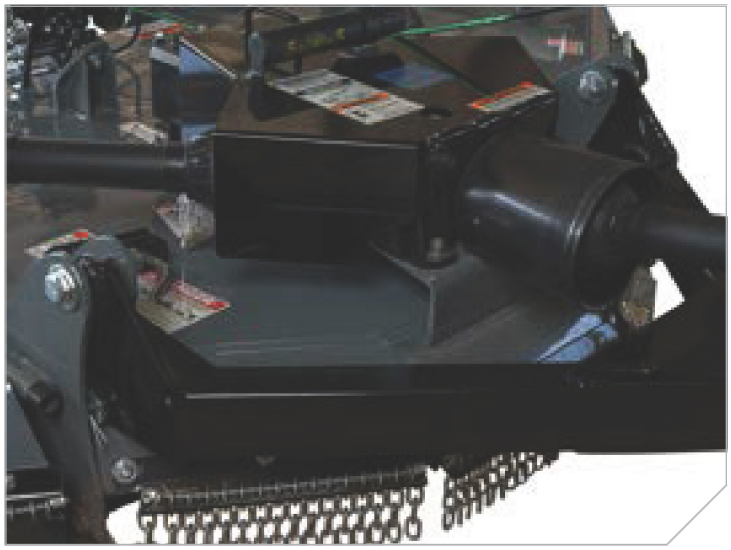

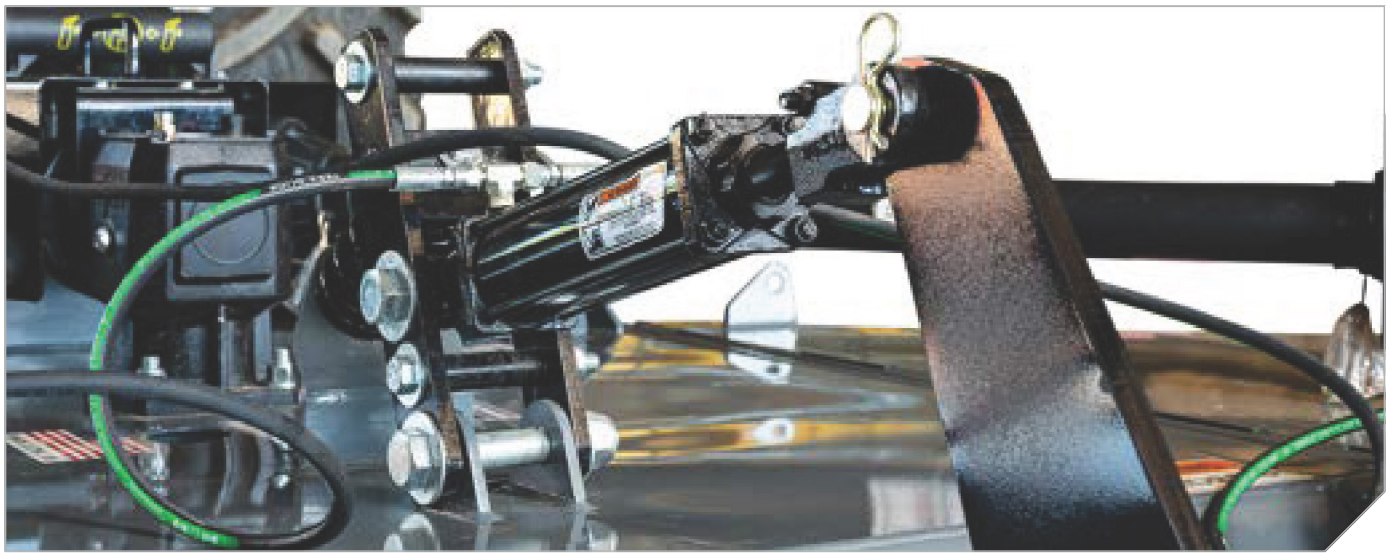

2515 SERIES

MEDIUM-DUTY 15' FLEX-WING CUTTERS

IronCraft's 2515 will make quick work of tough jobs. This 15' Flex-Wing Rotary Cutter is designed for tractors with a minimum PTO horsepower of 50. It only requires one hydraulic remote and can cut material up to 2-1/2" in diameter. Match your cutter to your tractor with five different color choices.

COLOR OPTIONS



	2515
PTO HORSEPOWER	50 PTO HP MINIMUM
CUTTING WIDTH	180"
OVERALL WIDTH	188"
OVERALL LENGTH W/ WHEEL	186"
TRANSPORT WIDTH	90"
TRANSPORT HEIGHT	83" - 87"
CUTTING CAPACITY	UP TO 2-1/2"
CUTTING HEIGHT	2" TO 15"
APPROXIMATE WEIGHT	4500 LBS W/6-26" LAMINATED TIRES
APPROXIMATE TONGUE WEIGHT	1500 LBS
BLADE TIP SPEED	17,135 FPM (540 RPM)
BLADES	1/2" X 4" UPLIFT
OUTBOARD GEARBOXES	190 HP
SPLITTER GEARBOX	235 HP
GEARBOX RPM	540 OR 1000 RPM
GEARBOX OIL	85W-140 (FACTORY FILLED)
OUTPUT SHAFT DIAMETER	2"
INPUT PTO	ASAE CAT 4 CV
WING DRIVE PTO	ASAE CAT 6 W/ SLIP CLUTCH

HITCH	SWIVEL PIVOT
DECK THICKNESS	10 GA
SIDE SKIRT MATERIAL	1/4"
HEIGHT ADJUSTMENT	HYDRAULIC CYLINDER
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE
SUSPENSION	1 HEAVY DUTY SPRING
WING FLEX	22 DEGREES DOWN TO 88 DEGREES UP
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP
WING CYLINDERS	SINGLE ACTING
SKID SHOES (STANDARD)	REPLACEABLE
SAFETY DEFLECTORS	SINGLE ROW CHAINS
TOW CHAINS	STANDARD
BLADE OVERLAP	6"
BLADE CARRIER	ROUND PAN
WHEELS & TIRES	4-20" laminated std (optional 4 or 6 tires in 26" laminated, 29" aircraft or 26" foam filled)
DECK RINGS	N/A
LED LIGHT KIT	OPTIONAL
GEARBOX WARRANTY	5 YEAR LIMITED




IRONCRAFT




WARNING
2515

3515 HEAVY-DUTY 15' FLEX-WING CUTTER

The 3515 is IronCraft's Heavy-Duty 15’ Flex-Wing Rotary Cutter. It has a heavy 7 Gauge press formed blade pan that is strategically designed for greater rotational balance, better cut quality, and greater gearbox longevity and a reinforced deck. The 3515 can cut material up to 3-1/2” with a minimum PTO horsepower requirement of 60 and is available in five different color choices.


COLOR OPTIONS



	3515
PTO HORSEPOWER	60 PTO HP MINIMUM
CUTTING WIDTH	180"
OVERALL WIDTH	188"
OVERALL LENGTH W/ WHEEL	200"
TRANSPORT WIDTH	90"
TRANSPORT HEIGHT	83" - 87"
CUTTING CAPACITY	UP TO 3-1/2"
CUTTING HEIGHT	2" TO 15"
APPROXIMATE WEIGHT	5600 LBS W/ 6-26" LAMINATED TIRES
APPROXIMATE TONGUE WEIGHT	1900 LBS
BLADE TIP SPEED	17,135 FPM (540 RPM)
BLADES	1/2" X 4" UPLIFT
OUTBOARD GEARBOXES	190 HP
SPLITTER GEARBOX	235 HP
GEARBOX RPM	540 OR 1000
GEARBOX OIL	85W-140 (FACTORY FILLED)
OUTPUT SHAFT DIAMETER	2"
INPUT PTO	ASAE CAT 6 CV W/ SLIP CLUTCH
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH

HITCH	SWIVEL PIVOT
DECK THICKNESS	10 GA
SIDE SKIRT MATERIAL	1/4" X 13-1/2"
HEIGHT ADJUSTMENT	HYDRAULIC CYLINDER
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE
SUSPENSION	2 HEAVY DUTY SPRINGS POSITIONED ON THE CENTER TAIL WHEEL AXLE
WING FLEX	22 DEGREES DOWN TO 100 DEGREES UP
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP
WING CYLINDERS	DUAL ACTING
SKID SHOES (STANDARD)	REPLACEABLE
SAFETY DEFLECTORS	SINGLE ROW CHAINS
TOW CHAINS	STANDARD
BLADE OVERLAP	6"
BLADE CARRIER	ROUND PAN
WHEELS & TIRES	4-20” laminated std (optional 4, 6 or 8 tires in 26” laminated, 29” aircraft or 26” foam filled)
DECK RINGS	STANDARD
LED LIGHT KIT	OPTIONAL
GEARBOX WARRANTY	5 YEAR LIMITED



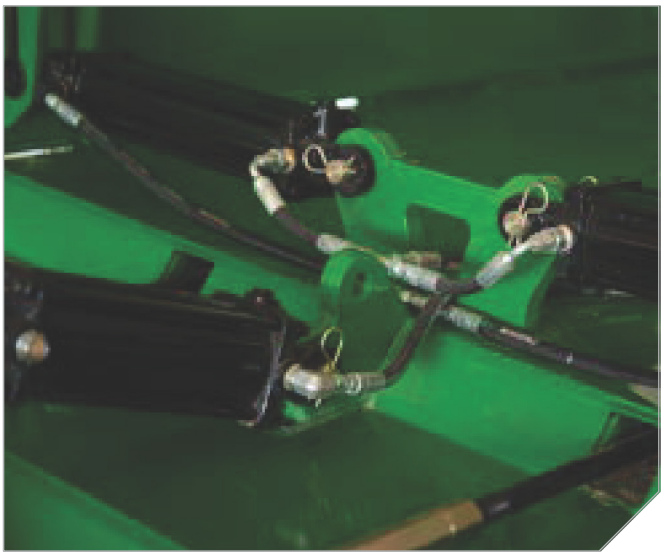






3520 HEAVY-DUTY 20' FLEX-WING CUTTER

The 3520 is IronCraft's Heavy-Duty 20' Flex-Wing Rotary Cutter. Wheter you're maintaining utility right-of way, airports, fields or trail systems - the 3520 will be your trusted sidekick. Built for the toughest conditions, the 3520 provides a cleaner, more reliable cut while being easy to maintain and service.

COLOR OPTIONS

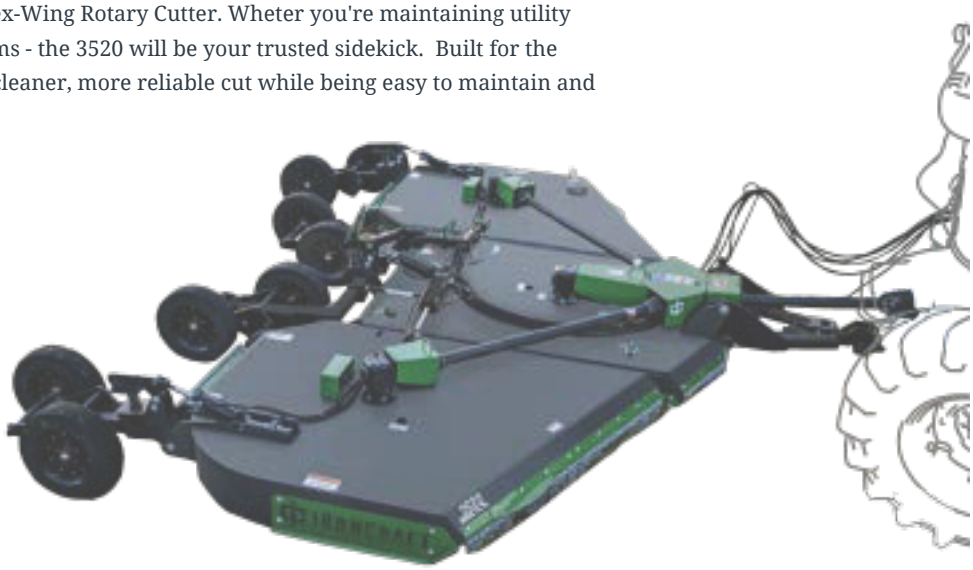

	3520
PTO HORSEPOWER	80 PTO HP MINIMUM
WORKING WIDTH	240"
OVERALL WIDTH	249"
OVERALL LENGTH W/ WHEEL	
TRANSPORT WIDTH	94" (with tandems 108")
TRANSPORT HEIGHT	
CUTTING CAPACITY	4"
CUTTING HEIGHT	2" TO 15"
APPROXIMATE WEIGHT	8700 LBS W/ 8-26" LAMINATED TIRES
APPROXIMATE TONGUE WEIGHT	2,700 LBS
BLADE TIP SPEED	540 RPM-16,600 FPM/1000RPM-17,400FPM
BLADES	1/2" X 4" UPLIFT
OUTBOARD GEARBOXES	225 HP
SPLITTER GEARBOX	275 HP
GEARBOX RPM	540 OR 1000
GEARBOX OIL	85W-140 (FACTORY FILLED)
OUTPUT SHAFT DIAMETER	
INPUT PTO	ASAE CAT 6
WING DRIVE PTO	ASAE CAT 6

HITCH	SWIVEL PIVOT SELF LEVELING
DECK THICKNESS	10 GA CENTER DECK/ 7 GA WING DECKS
SIDE BANDS	1/4" X 13-1/2"
HEIGHT ADJUSTMENT	
WING ADJUSTMENTS	
SUSPENSION	2 HEAVY DUTY SPRINGS POSITIONED ON THE CENTER TAIL WHEEL AXLE
WING FLEX	22 DEGREES DOWN TO 100 DEGREES UP
WING FREE FLOAT	
WING CYLINDERS	
SKID SHOES (STANDARD)	REPLACEABLE
SAFETY DEFLECTORS	SINGLE ROW STANDARD
TOW CHAINS	STANDARD
WALKING TANDEMS	OPTIONAL
BLADE CARRIER	ROUND PAN
WHEEL TYPE	26" LAMINATED, 26" FOAM FILLED, OR 29" PNEUMATIC
DECK RINGS	STANDARD
LED LIGHT KIT	STANDARD
GEARBOX WARRANTY	5 YEAR LIMITED

FL SERIES
BULLY FLAIL MOWER

The FL series flail mower is compact and light, making it the perfect choice for sub-compact or compact tractors ranging in PTO horsepower from 23 to 40. This is a great attachment for weekend farmers and gardening. It is available with hammers and blades.

COLOR OPTIONS

	FL-135	FL-165
PTO HORSEPOWER	23 - 35 HP	25 - 40 HP
CUTTING WIDTH	52"	64"
OVERALL WIDTH	57"	69"
HITCH	CAT 1	
WEIGHT	386 LBS	518 LBS
NUMBER OF HAMMERS	24	
NUMBER OF BLADES	48	
ROLLER THICKNESS	10 GAUGE	
ROTOR THICKNESS	5/16"	
FRAME THICKNESS	9 GAUGE	
BELTS	3	
WARRANTY	1 YEAR	1 YEAR











FMH SERIES
STANDARD-DUTY FLAIL MOWER



The FMH series has a wide working width up to 86" reach and can mow up to 1-1/2" diameter material with the use of flails or hammers. It comes standard with hammers, hydraulic side shift, rear roller, and rakes. Knives are additional.

COLOR OPTIONS








	FMH-160H	FMH-175H	FMH-205H	FMH-220H
PTO HORSEPOWER	35 - 70 HP	40 - 70 HP	45 - 70 HP	50 - 70 HP
MOWING WIDTH	63"	69"	80.7"	86-1/2"
OVERALL WIDTH	69"	75-1/2"	84.4"	93"
HITCH	CAT 1, 3-PT			
WEIGHT	908 LBS	957 LBS	1,063 LBS	1,1116 LBS
HYDRAULIC OFFSET	12"			
NUMBER OF HAMMERS	20	22	26	28
BELTS	4			
WARRANTY	1 YEAR			


BPF SERIES
HEAVY-DUTY FLAIL MOWER


Designed for tractors ranging in horsepower from 50 to 100, the BPF series can cut up to 3" material. It has a open deck design for easy maintenance. It comes standard with hydraulic side shift and a rear roller.

COLOR OPTIONS


	BPF-225	BPF-250
PTO HORSEPOWER	50 - 100 HP	
WORKING WIDTH	87"	98"
OVERALL WIDTH	96"	106"
HITCH	CAT 2, 3-PT	
WEIGHT (W/OUT PTO)	1,726 LBS	1,907 LBS
NUMBER OF HAMMERS	20	24
NUMBER OF BLADES	60	72
BELTS	4	5
ROLLER DIAMETER	6.69"	
ROTOR DIAMER	6.69"	
WARRANTY	1 YEAR	

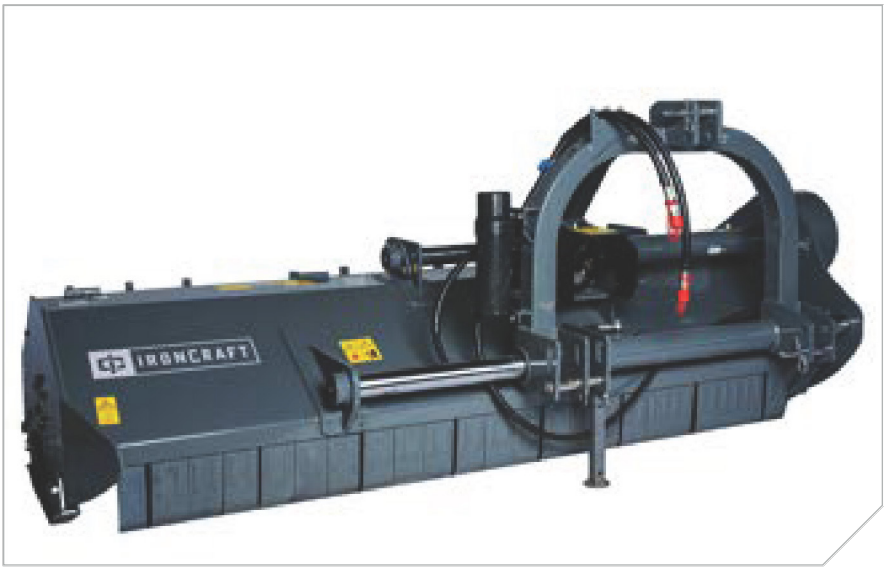

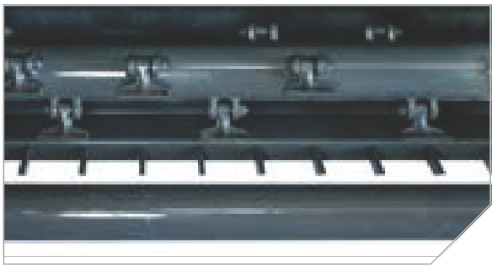

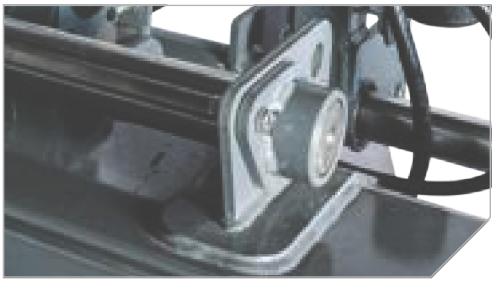



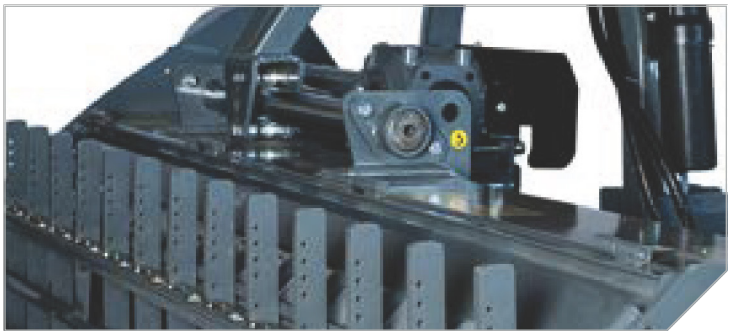


SGM SERIES
FINISHING MOWERS









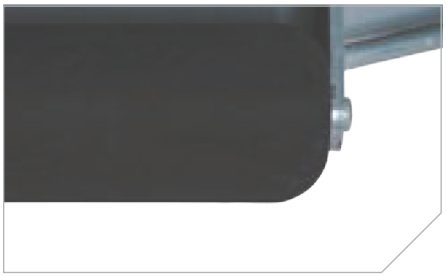

IronCraft's SGM series finishing mowers provide a superior cutting quality for turf surfaces and well-maintained lawns. They work well for the needs of golf courses, large estate owners, municipalities, ranchers, or commericial mowing and landscape operations.

COLOR OPTIONS

	SGM-4	SGM-5	SGM-6	SGM-7
PTO HORSEPOWER	14 - 23 HP	23 -32 HP	32 - 40 HP	35 - 65 HP
CUTTING WIDTH	48"	60"	72"	84"
HITCH	CAT 1			
QH COMPATIBLE	YES			
WEIGHT	420 LBS	440 LBS	500 LBS	600 LBS
NUMBER OF BLADES	3			
NUMBER OF BELTS	2			
WARRANTY	1 YEAR			

FRF SERIES
OFFSET FLAIL MOWER

Offset flail mowers go further to tackle areas where a brush mower can't without backing up.



COLOR OPTIONS

	FRF125	FRF145	FRF165
TRACTOR HP	20-40 HP	30-45 HP	40-50 HP
WEIGHT	630 lb	672 lb	703 lb
HITCH	CAT 1		
CUTTING WIDTH	47 in	55 in	63 in
# OF HAMMER BLADES	20	24	28
HAMMER DIMENSIONS	3.4" x 1.7"		
SIDE TRANSMISSION	3 BELTS		4 BELTS
ROTOR DIAMETER	4.2"		
ROLLER DIAMETER	4.7"		
PTO SHAFT SERIES	4		





BRF SERIES

HEAVY DUTY OFFSET FLAIL MOWER



The multi-purpose capability of IronCraft's BRF series makes it ready to face anything! Even on uneven terrain, it shreds grass, weeds, and brushwood up to 2" in diameter. Robust, yet easy to handle in tight areas, IronCrafts new BRF line is ideal for ripping, leveling, finish grading, and backfilling applications.

COLOR OPTIONS

	BRF160	BRF180	BRF200
TRACTOR HP	70-100 HP		
WEIGHT	1433 lb	1565 lb	1719 lb
HITCH	CAT 2		
CUTTING WIDTH	63"	71"	79"
# OF HAMMER BLADES	14	16	
HAMMER DIMENSIONS	4.9" x 1.7"		
SIDE TRANSMISSION	4 BELTS		
ROTOR DIAMETER	6.3"		
ROLLER DIAMETER	7.6"		
PTO SHAFT SERIES	6		




3100 SERIES
STANDARD-DUTY BOX BLADES

IronCraft's 3100 series box blades are ideal for use on the farm, at building sites, or outdoor arenas. They are designed to work topsoil, gravel, mulch, or manure. They feature adjustable shanks and are available in five different widths and color choices.



COLOR OPTIONS



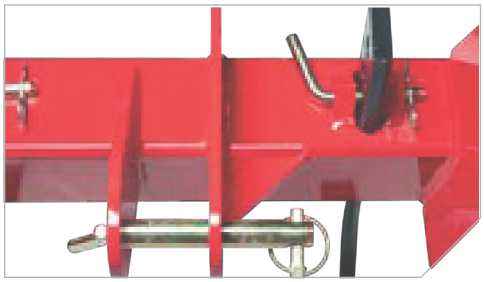






	3104	3105	3106	3107	3108
HORSEPOWER REQUIRED	15-45 HP				
WORKING WIDTH	48"	60"	72"	84"	96"
MOLDBOARD HEIGHT	17"				
OVERALL DEPTH	22"				
WEIGHT	290 LBS	323 LBS	357 LBS	390 LBS	421 LBS
NUMBER OF SHANKS	3	4	5	6	6
A-FRAME MATERIAL	3/8"				
CUTTING EDGES	6"				
QUICK HITCH COMPATIBLE	YES				
HITCH	CAT 1				
WARRANTY	1 YEAR				

3200 SERIES
HEAVY-DUTY BOX BLADES



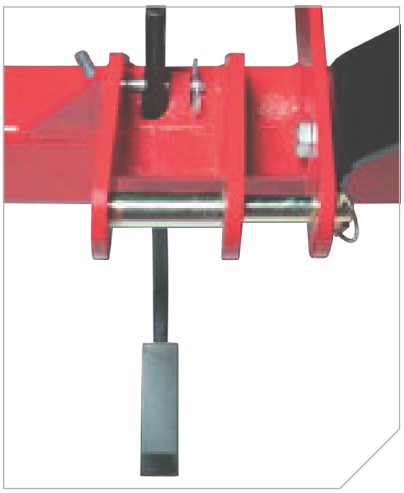





For tough jobs, the 3200 heavy-duty box scrapers will help maintain your farm, building site, or landscaping. They make quick work of ripping up dirt, grading and leveling land, or spreading soil. They are available in 3 different working widths and choice of 5 different colors.

COLOR OPTIONS

	3206	3207	3208
HORSEPOWER REQUIRED	30 - 70 HP		
WORKING WIDTH	72"	84"	96"
MOLDBOARD HEIGHT	17"		
OVERALL DEPTH	22"		
WEIGHT	530 LBS	586 LBS	640 LBS
NUMBER OF SHANKS	5	6	6
A-FRAME MATERIAL	1/2"		
CUTTING EDGES	6"		
QUICK HITCH COMPATIBLE	YES		
HITCH	CAT 1 & 2		
WARRANTY	1 YEAR		


3600 SERIES


STANDARD-DUTY DUAL EDGE GRADERS


IronCraft's 3600 dual-edge graders can be used to maintain gravel driveways, level a garden plot, and smooth dirt areas including horse arenas and barn floors. They feature replaceable skid shoes, reversible blades, adjustable blade height and shanks.




COLOR OPTIONS










	3605	3606
HORSEPOWER REQUIRED	25 -55 HP	35 - 55 HP
WORKING WIDTH	60"	72"
OVERALL WIDTH	65-5/8"	77-5/8"
OVERALL LENGTH	52-7/8"	
OVERALL HEIGHT	33-3/4"	
WEIGHT W/ SHANKS	490 LBS	545 LBS
NUMBER OF SHANKS	4	5
A-FRAME MATERIAL	3/8"	
SIDE PANEL THICKNESS	3/16"	
SIDE PANEL HEIGHT	15-11/16"	
SIDE PANEL LENGTH	46-3/8"	
LOWER DRAFT LINK ATTACH	CLEVIS TYPE	
HITCH	CAT 1	
QH COMPATIBLE	YES	


	3605	3606
SCARIFIER SUPPORT TUBE	4" X 4" X 1/4"	
REAR BEAM CONSTRUCTION	3" X 3" X 3/16"	
SKID SHOES (STANDARD)	REPLACEABLE	
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE PLACEMENT	TWO GRADING BLADES W/ 18-1/4" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YEAR	

3700 SERIES


HEAVY-DUTY DUAL EDGE GRADERS

The 3700 series dual edge graders are designed for tractors ranging in horsepower from 40 - 80 and are quick hitch compatible. Featuring replaceable skid shoes, reversible blades, adjustable blade height and shanks, they can be used to maintain gravel driveways, smooth areas of dirt, and level garden plots.







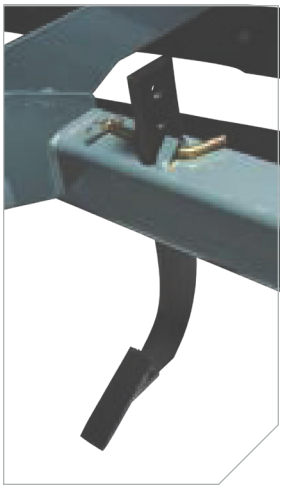

COLOR OPTIONS





	3707	3708
HORSEPOWER REQUIRED	40 - 80 HP	50 - 80 HP
WORKING WIDTH	84"	96"
OVERALL WIDTH	89-5/8"	101-5/8"
OVERALL LENGTH	58-1/2"	
OVERALL HEIGHT	33-3/4"	
WEIGHT W/ SHANKS	700 LBS	740 LBS
NUMBER OF SHANKS	6	6
A-FRAME MATERIAL	3/8"	
SIDE PANEL THICKNESS	3/16"	
SIDE PANEL HEIGHT	15-11/16"	
SIDE PANEL LENGTH	52-3/8"	
LOWER DRAFT LINK ATTACH	CLEVIS TYPE	
HITCH	CAT 1 & 2	
QH COMPATIBLE	YES	


	3707	3708
SCARIFIER SUPPORT TUBE	4" X 4" X 1/4"	
REAR BEAM CONSTRUCTION	3" X 3" X 3/16"	
SKID SHOES (STANDARD)	REPLACEABLE	
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE PLACEMENT	TWO GRADING BLADES W/ 19-7/8"" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YEAR	

4100 SERIES
ECONOMY GRADER BLADES


The 4100 Series economy grader blade is for your smaller horsepower tractors ranging in horsepower from 15 - 35. They will handle your basic land grading, small construction, or maintenance jobs with ease.




COLOR OPTIONS










	4104	4105	4106	4107
HORSEPOWER REQUIRED	15 - 35 HP			
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	13"		14"	
WEIGHT	158 LBS	179 LBS	202 LBS	223 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY	1 YEAR			

4300 SERIES
STANDARD-DUTY GRADER BLADES




IronCraft's 4300 series standard duty box blade are ideal for basic land grading, leveling, or backfilling. They are available in 4 different working widths and feature five position angle adjustment as well as three-position tilt adjustment.

COLOR OPTIONS





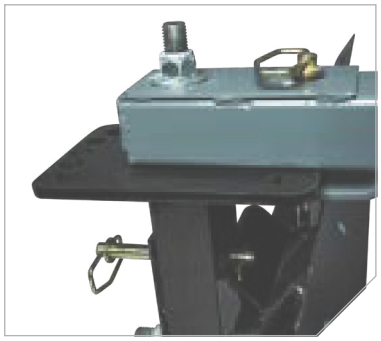

	4304	4305	4306	4307
HORSEPOWER REQUIRED	15 - 45 HP			
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	13"		14"	
WEIGHT	178 LBS	199 LBS	252 LBS	276 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
TILT ADJUSTMENT	3 POSITION			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY	1 YEAR			

4400 SERIES
OFFSET GRADER BLADES

These Offset Grader Blades offer ease of moving topsoil, gravel, snow, and other similar materials. They are built to give you years of reliable performance, and are designed to work with 35 to 65 hp tractors.



COLOR OPTIONS

	4405	4406	4407
HORSEPOWER REQUIRED	35 - 65 HP		
WORKING WIDTH	60"	72"	84"
MOLDBOARD HEIGHT	15-1/2"		
WEIGHT	323 LBS	340 LBS	358 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION		
A-FRAME MATERIAL	3/8"		
CUTTING EDGES	6"		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		


4500 SERIES
HEAVY-DUTY GRADER BLADES



These Heavy-Duty Grader Blades are IronCraft's toughest grader blades. These models will easily meet all of your land grading, leveling, or backfilling needs. Designed for 50 to 75 hp tractors, they feature a five-position angle adjustment, three-position tilt adjustment, utilize a ratchet jack for the offset adjustment, and are Category I & II quick hitch compatible. Three models provide working widths from 72” to 96”.

COLOR OPTIONS



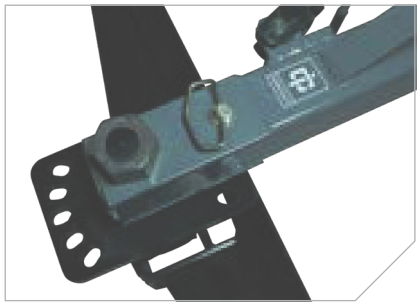





	4506	4507	4508
HORSEPOWER REQUIRED	45 - 75 HP	50 - 75 HP	55 - 75 HP
WORKING WIDTH	72"	84"	96"
MOLDBOARD HEIGHT	17"		
WEIGHT	439 LBS	469 LBS	503 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION		
OFFSET ADJUSTMENT	RATCHET JACK		
A-FRAME MATERIAL	3/8"		
CUTTING EDGES	6"		
HITCH	CAT 1 & 2		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		


S100 SERIES
STANDARD-DUTY LANDSCAPE RAKES

IronCraft's Standard-Duty Landscape Rakes work well for cleaning and preparing sites for seeding. They can spread rocks, move debris, and reshape soil. Designed for use by landscapers and contractors, they will meet the demands required for golf course maintenance, terracing hillsides, shaping run-off control ditches, and preparing areas for reforestation.

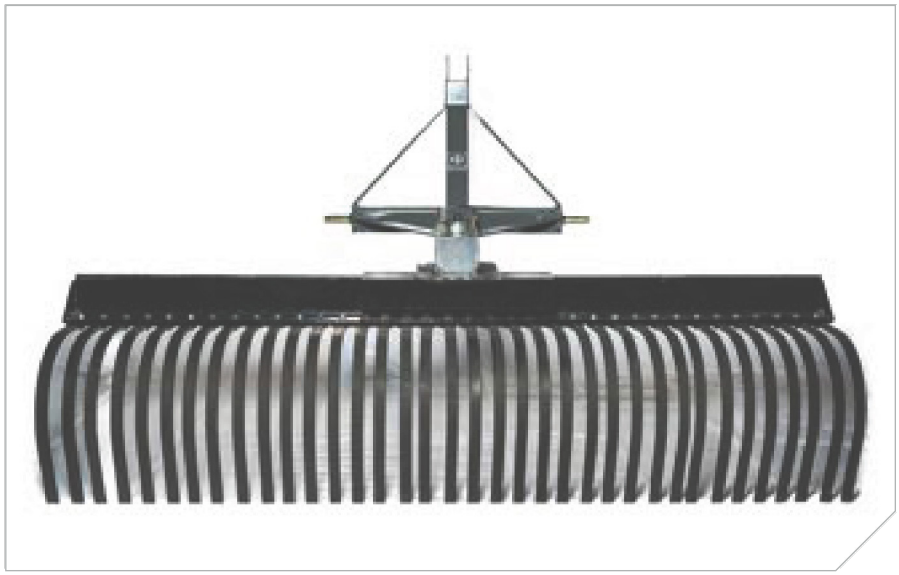

COLOR OPTIONS

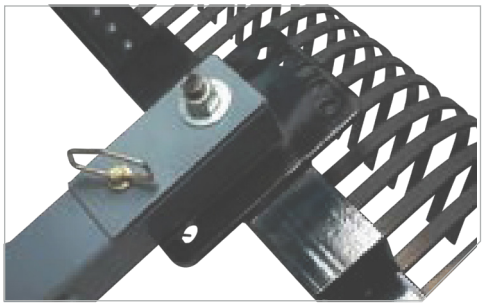

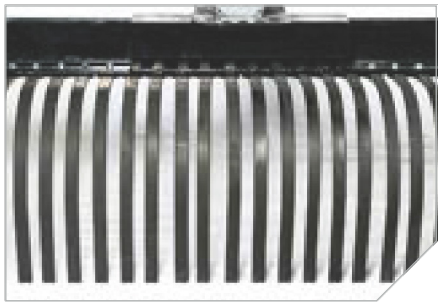



	S104	S105	S106	S107	S108
HORSEPOWER REQUIRED	15 - 45 HP	20 - 45 HP	25 - 45 HP	30 - 45 HP	35 - 45 HP
WORKING WIDTH	48"	60"	72"	84"	96"
TINES PER FOOT	6				
WEIGHT	158 LBS	180 LBS	229 LBS	251 LBS	285 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE				
A-FRAME MATERIAL	3/8"				
MAINFRAME	4" X 4" ANGLE				
HITCH	CAT 1				
QH COMPATIBLE	NO				
WARRANTY	1 YEAR				

FMA 125


LIGHT-DUTY CHAIN DRIVE TILLERS

The FMA125 is a chain drive tiller recommended for tractors ranging in horsepower from 13 to 25. It is designed for gardening and horticulture uses.

COLOR OPTIONS

	FMA-125
HORSEPOWER	13 - 25 HP
TILLING WIDTH	49"
OVERALL WIDTH	53"
MAX WORKING DEPTH	4-3/4"
HITCH	CAT 1 , 3-PT
# OF FLANGES ON ROTOR	6
# OF TINES PER FLANGE	4
# OF TINES	24
WEIGHT (WITHOUT PTO)	309 LBS
PTO INPUT SPEED	540 RPM
ROTOR TUBE DIAMETER	2"
ROTOR SWING DIAMETER	12-1/2"
WARRANTY	1 YEAR



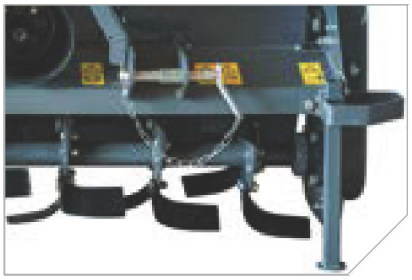





UL SERIES
LIGHT-DUTY GEAR DRIVE TILLERS

The UL Rotary Tiller is suitable for tractors from 20 to 40 horsepower with a category 1 hitch. The UL models are light-duty and dependable, appropriate for gardening and horticulture.

COLOR OPTIONS

	UL-48	UL-60
HORSEPOWER	20 - 25 HP	25 - 40 HP
TILLING WIDTH	48"	60"
OVERALL WIDTH	53"	65"
MAX WORKING DEPTH	7"	
HITCH	CAT 1, 3-PT	
# OF FLANGES ON ROTOR	6	7
# OF TINES PER FLANGE	6	
# OF TINES	36	42
WEIGHT (WITHOUT PTO)	397 LBS	441 LBS
PTO INPUT SPEED	540 RPM	
ROTOR TUBE DIAMETER	3"	
ROTOR SWING DIAMETER	15"	
WARRANTY	1 YEAR	1 YEAR







UM SERIES
MEDIUM-DUTY GEAR DRIVE TILLERS


IronCraft's UM Rotary Tiller is medium-duty and dependable, able to work demanding soils like vineyards or orchards. The UM series is suitable for tractors from 25 to 50 horsepower with a category 1 hitch.

	UM-56	UM-72
HORSEPOWER	25 - 50 HP	
TILLING WIDTH	60"	73"
OVERALL WIDTH	65"	78"
MAX WORKING DEPTH	7"	
HITCH	CAT 1, 3-PT	
# OF FLANGES ON ROTOR	7	9
# OF TINES PER FLANGE	6	
# OF TINES	42	54
WEIGHT (WITHOUT PTO)	578 LBS	684 LBS
PTO INPUT SPEED	540 RPM	
ROTOR TUBE DIAMETER	3"	
ROTOR SWING DIAMETER	17"	
WARRANTY	1 YEAR	

COLOR OPTIONS





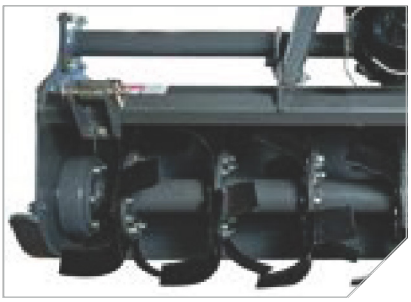




UH SERIES
HEAVY-DUTY ROTARY TILLERS

The UH series is suitable for tractors from 50 to 65 hp with a Category 2 hitch. The UH models are heavy-duty and dependable, cutting through very demanding and stony soils.


COLOR OPTIONS

	UH-60-R	UH-72-R	UH-84
PTO HORSEPOWER	40 - 55 HP	45 - 60 HP	50 - 65 HP
ROTATION	REVERSE		FORWARD
TILLING WIDTH	65	72	85"
MAX WORKING DEPTH	7-1/2"		8"
HITCH	CAT 1 & 2, 3-PT		
# OF FLANGES ON ROTOR	7	8	9
# OF TINES PER FLANGE	6		
# OF TINES	42	48	54
WEIGHT (WITHOUT PTO)	860	926	993 LBS
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3-1/2"		4"
ROTOR SWING DIAMETER	19"		
WARRANTY	1 YEAR		

REVERSE

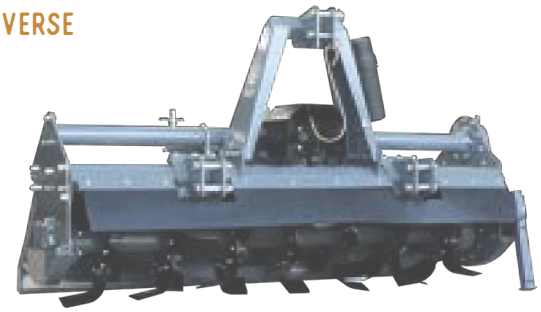

REVERSE

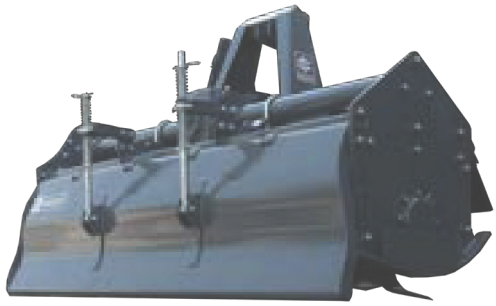







VH 90 EXTREME-DUTY GEAR DRIVE TILLER


The VH series is a suitable for tractors from 75 to 125 horsepower with category 2 or 3 hitch. The VH models are heavy-duty and dependable, cutting through very demanding and stony soils. The speed of the rotor can be adjusted.

COLOR OPTIONS

	VH-90
HORSEPOWER	75 - 125 HP
TILLING WIDTH	90"
OVERALL WIDTH	95"
MAX WORKING DEPTH	9"
HITCH	CAT 2 OR 3, 3-PT
# OF FLANGES ON ROTOR	9
# OF TINES PER FLANGE	6
# OF TINES	54
WEIGHT (WITHOUT PTO)	1,557 LBS
PTO INPUT SPEED	540 RPM
ROTOR TUBE DIAMETER	3-1/2"
ROTOR SWING DIAMETER	17"
WARRANTY	1 YEAR





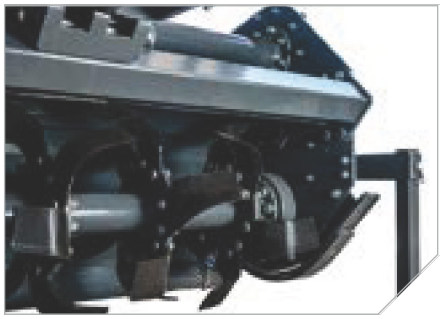



7100 SERIES
ANGLE FRAME DISC HARROW


IronCraft's angle frame disc harrows feature notched discs designed to open and break up the soil surface for prepping seedbeds for planting. They are designed for use in residential landscaping, small gardens, nurseries, hobby farms, and wild game food plots.

	7112	7116
HORSEPOWER	20 - 30 HP	25 - 40 HP
WIDTH	48"	60"
WEIGHT	391 LBS	502 LBS
NUMBER OF DISC BLADES	12	16
DISC BLADE SIZE	16"	
DISC BLADE SPACING	7-1/2"	
BEARINGS	CAST	
HITCH	CAT 1	
QH COMPATIBLE	YES	
WARRANTY	1 YEAR	


COLOR OPTIONS





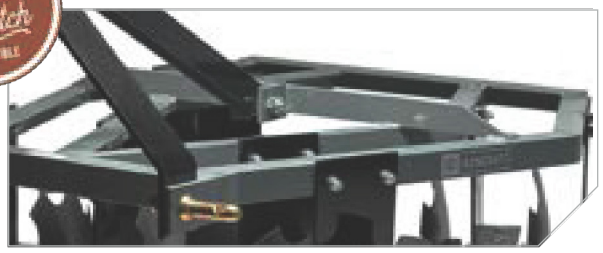



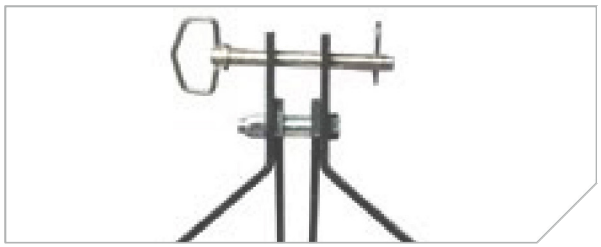



7300 SERIES
TUBE FRAME DISC HARROW

	7316.2	7320.2	7324.2
HORSEPOWER	30 - 40 HP	35 - 45 HP	40 - 50 HP
WIDTH	60"	72"	84"
WEIGHT	600 - 640 LBS	715 LBS	790 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	16" OR 18"	18"	
DISC BLADE SPACING	7-1/2"		
BEARINGS	SEALED		
HITCH	CAT 1 & 2		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

These Tube Frame Disc Harrows are for medium-duty usage with notched discs which easily break up and redistribute cultivated topsoil. They will easily meet the needs of commercial landscapers, larger nurseries and gardens, as well as small farms.

COLOR OPTIONS





7400 SERIES
HEAVY-DUTY TUBING DISC HARROW

Available in 3 different sizes, the 7400 Series heavy-duty tube frame disc harrow will work with tractors ranging in horsepower from 35 to 80. They will break up soil easily and redistribute cultivated topsoil. The harrows are a great choice for commercial landscapers, farms, ranches, and construction applications.

COLOR OPTIONS





	7416.2	7420.2	7424.2
HORSEPOWER	35 - 60 HP	50 - 70 HP	60 - 80 HP
WIDTH	72"	92"	108"
WEIGHT	725 LBS	825 LBS	925 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	20"		
DISC BLADE SPACING	9"		
BEARINGS	GREASEABLE		
HITCH	CAT 1 & 2		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

6100 & 6200
MOLDBOARD PLOWS

With a choice of one-bottom or two-bottom, IronCraft's Moldboard Plows is a basic moldboard plow, best suited for gardens, nurseries, hobby farms, and wild game food plots. They are designed to turn over and aerate the soil for primary tillage, as well as bury residue and for tractors ranging in horsepower from 18 to 50.

COLOR OPTIONS

KEY FEATURES
AVAILABLE IN 12", 14", OR 16"
REPLACEABLE SHARE & MOLDBOARD



6100 | ONE BOTTOM MOLDBOARD PLOW




6200 | TWO BOTTOM MOLDBOARD PLOW

8100 SERIES
SPIKE AERATORS



The 8100 effectively perforates the ground to better accept air, sunlight, water, and nutrients into the soil. Each aerator spike is approximately 2-3/4 long and 2' wide at maximum depth. The depth and width of the hole can be controlled in three ways: by using just the weight of the aerator frame, by adding water to the 12-inch drum, and/or by stacking 16-inch blocks on top of the frame. Spike aerators, over plug aerators, have a less aggressive impact on the lawn and can be used throughout the year.

COLOR OPTIONS

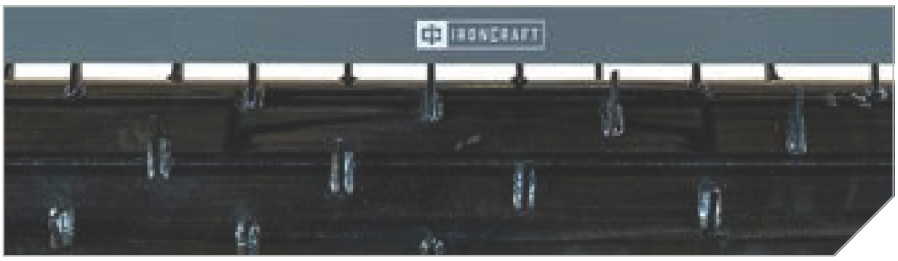





	8104	8105	8106	8107
WIDTH	48"	60"	72"	84"
HITCH TYPE	3-PT, CAT 1			
QH COMPATIBLE	YES			
WEIGHT EMPTY	295 LBS	338 LBS	382 LBS	427 LBS
WEIGHT FILLED	505 LBS	601 LBS	698 LBS	787 LBS
WARRANTY	1 YEAR			

8200 SERIES
CORE PLUG AERATORS

Core plug holes provide the plant roots with better access to oxygen and improves the ability of the soil to hold water which could run off on non-aerated ground. These holes guide water and nutrients deep into the ground to reach the plant roots. With four models, you can size your aerator by the acreage being conditioned or by the size of your tractor. Models are available to aerate anything from a homeowner's lawn to an athletic field, municipal golf course, or farming application.









COLOR OPTIONS

	8204	8205	8206	8207
WIDTH	48"	60"	72"	84"
HITCH TYPE QH	3-PT, CAT 1			
COMPATIBLE	YES			
WEIGHT EMPTY	367 LBS	429 LBS	490 LBS	551 LBS
WEIGHT FILLED	577 LBS	692 LBS	806 LBS	922 LBS
WARRANTY	1 YEAR			

9300 BP

HEAVY-DUTY BOOM POLE

The 9300BP Heavy-Duty Boom Pole is a lifting tool ideal for any farm or ranch. With a lift capacity of 1500 lbs., this versatile tool can lift heavy farming equipment, logs, car and truck engines, and much more. It has a welded lifting loop, and is Category l and ll quick hitch compatible for maximum versatility.



COLOR OPTIONS


KEY FEATURES
1500 LBS CAPACITY
CAT 1/2 HITCH
TUBE FRAME


9300 BU
BALE UNROLLER

IRONCRAFT





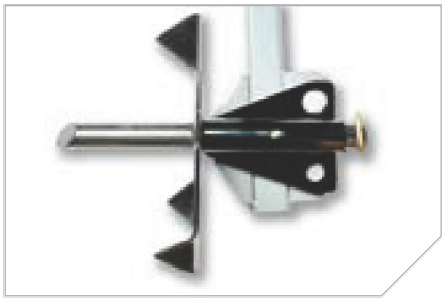

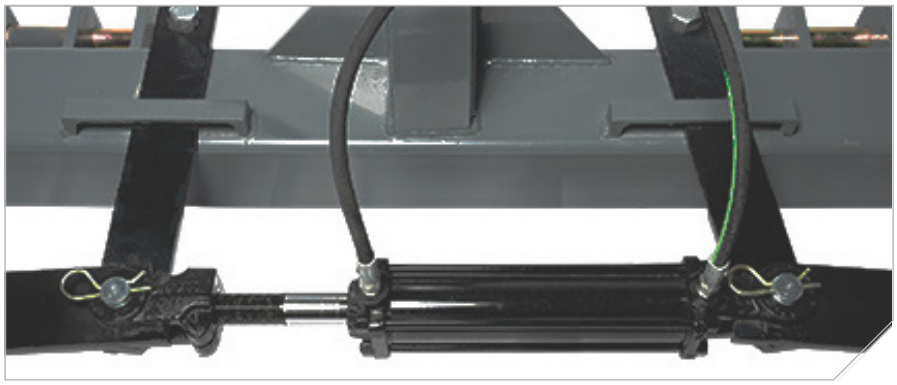

The 9300BU Bale Unroller makes quick work of lifting, transporting, and unrolling round bales in farming and ranching operations. It is built to give you years of reliable performance, and is designed to work with 25 to 65 hp tractors. The bale unroller can handle bales up to 2,200 lbs. in widths of 4, 5, and 6 feet. It comes equipped with a storage stand and is category l and ll quick hitch compatible.

COLOR OPTIONS

KEY FEATURES	
HORSEPOWER	25 - 65 HP
WEIGHT	375 LBS
MAX LIFTING CAPACITY	2200 LBS
CYLINDER	STANDARD
HOSES	STANDARD
BALE WIDTH	ADJUSTABLE 4', 5', OR 6'
HITCH	CAT 1 & 2
QH COMPATIBLE	YES
WARRANTY	1 YEAR

PHD POST HOLE DIGGERS

This utility sized auger will bore holes of 6”, 9” or 12’ diameter up to 45” deep. Strong and durable construction makes digging post holes for fence posts, or any number of other uses fast and easy. Our shear bolt driveline protection helps prevent equipment damage when unexpectedly contacting an immovable object. Our unit can operate on a variety of tractors within the 25 to 65 PTO horsepower range. Compatible with most Cat 1 and 2 three-point tractor hitches. The steel auger has replaceable, bolt-on cutting edges to maintain productive boring speeds throughout the life of the post hole digger.







COLOR OPTIONS

	PHD
DESCRIPTION	STANDARD DUTY
TRACTOR CATEGORY	CAT 1 & 2
GEARBOX	3:1 RATION, 2” OUTPUT SHAFT
DRIVELINE	YOKE TS 6-SPLINE PTO
AUGER DIAMETER	6” , 9”, 12”
BOOM	2-7/8’ O.D. TUBING
A–FRAME	2-7/8’ O.D. TUBING
OPTIONS	265 LBS
SHIPPING WEIGHT	265 LBS
WARRANTY	2 YEAR LIMITED
SAFETY SHIELDS	ON DRIVELINE, GEARBOX “U” JOINT, AND GEARBOX OUTPUT SHAFT
SHEAR BOLT	REPLACEABLE, ON INPUT SHAFT, TO PROTECT DRIVELINE, AUGER AND GEARS

9400 QH QUICK HITCHES







Our Cat 1 & 2 Quick Hitch adapters make your day more efficient by being able to quickly switch from one attachment to another. Reduce attachment or release time to seconds versus minutes with this quick hitch system. Recommended for tractors of 50 horsepower, it works with all Cat 1 or 2 IronCraft products, including PTO driven attachments. The quick hitch comes with a set of adapter bushing to properly connect attachments to the hitch. Locking handles are aspiring loaded keeping the attachment securely fastened to the adapter. Top link height is adjustable, if necessary, to accommodate a wide variety of attachments.

COLOR OPTIONS

	QUICK HITCH
HITCH CATEGORY	1 OR 2
DIMENSIONS (L X W X H)	30" X 8" X 24"
WEIGHT	68 LBS
MAX LIFTING CAPACITY	880 LBS
WARRANTY	1 YEAR

9510P & 9520P SPREADERS

Introducing the Ironcraft 9510P and 9520P spreaders, your perfect tool for fertilizer spreading. This top-of-the-line spreader is equipped with a steel conical hopper and can handle granular or crystalline fertilizers with ease.

The 9510P spreader features a four or six fins spreading disc, which allows for even distribution of fertilizer across your fields. Don't settle for less when it comes to fertilizer spreading - choose the Ironcraft 9510P for unparalleled performance and reliability.



COLOR OPTIONS

	9510P	9520P
CAPACITY	441 lbs	992 lbs
WEIGHT	119 lbs	139 lbs
DIMENSIONS	37.4 in x 37.4 in x 37.4 in	43.7 in x 43.7 in x 46 in
SPREAD	26.5-46 ft	26.5-46 ft
HORSEPOWER	20 HP	20 HP

IC-AUXKIT
PTO HYDRAULIC KIT



Introducing the Ironcraft Auxillary PTO Hydraulic Kit! This kit is packed with features to give you the power and control you need to tackle any job with ease.

The kit comes with a 20-gallon reservoir tank that ensures you have enough hydraulic fluid for extended periods of use. The oil sight and temperature gauge on the reservoir makes it easy to monitor the fluid levels and temperature, ensuring that the system is always running at optimal performance.

	IC-AUXKIT
FLOW (GPM)	11.4 GPM
RESERVOIR TANK	20 Gallon
WEIGHT	400 lbs (when filled)

COLOR OPTIONS

4-N-1 Buckets CT4N1-60, CT4N1-66, CT4N1-72 SD4N1-72





The IronCraft 4-N-1 Buckets are versatile attachments for your skid steer. These attachments are ideal for grappling, dozing, backfilling, loading, digging and fine grading.

The cylinders on our compact tractor 4-N-1 Buckets have a 2" bore, and our Standard Duty 4-N-1 Buckets have a 2.5" bore. The 4-N-1 Buckets are equipped with a 1/2" x 6" cutting edges and 1/2" x 4" at all other engaging points. The 4-N-1 Buckets are built with top quality steel, oversized pins and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is used on.

- **2" cylinders on compact tractor**
- **2.5" cylinders on standard duty and heavy duty**
- **Grease fittings at every pivot point**
- **Optional weld on teeth**
- **Optional bolt on edge (HD)**
- **Optional side cutter (HD)**
- **Compact Tractor sizes: 60",66", 72" (under 40 hp)**
- **Standard Duty sizes: 72" (40 - 50 hp)**

Compact Tractor 4-N-1 Bucket Specs	Standard Duty 4-N-1 Bucket Specs

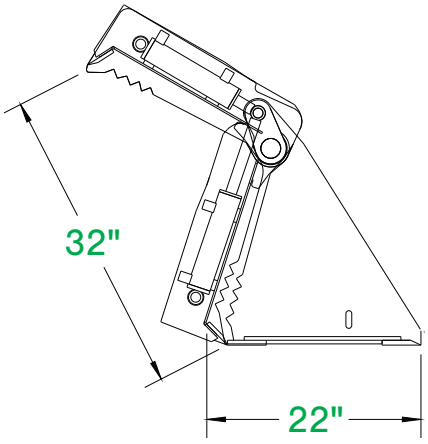

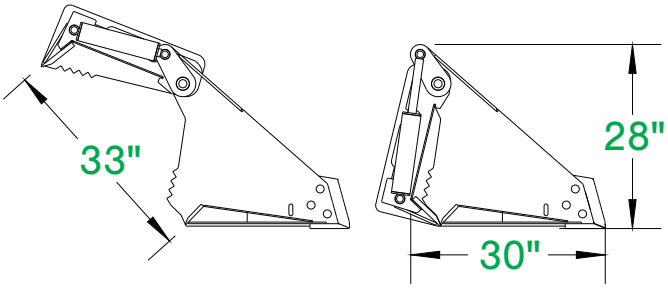

Heavy Duty Buckets
SNLB66 & SNLB72


Snow & Litter Bucket

The Heavy Duty Snow & Litter Bucket is ideal for lifting large volume, low weight material such as snow, mulch, manure, sawdust, shavings and any other type of loose or light debris. Its made for up to 65 HP track machines and up to 70 HP on wheel machines.

Available sizes:

66", 72"

- **Designed for large volume, low weight material**
- **3/16" bucket wrap**
- **3/4" x 6" edge**
- **3/8" wear bars & side e**

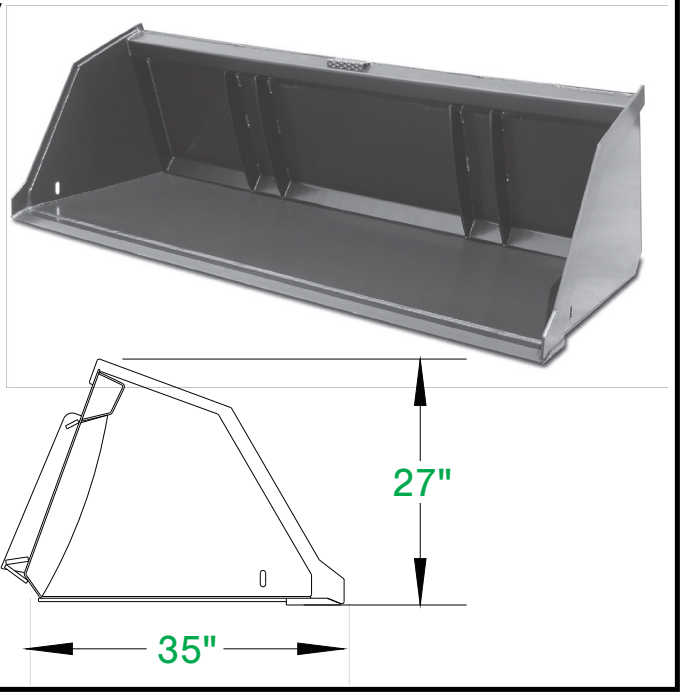


Compact Tractor / Heavy Duty
CTRAC66, CTRAC72, TRAC72, TRAC78



Our tractor buckets are designed with higher backs to prevent material from spilling over. They feature 3/16” steel sides and a 3/4” x 6” cutting edge. These buckets also come with holes in the sides for mounting a tooth bar and will hookup using universal Skid Steer and many tractor styles quick attach.

Tractor Bucket Specs

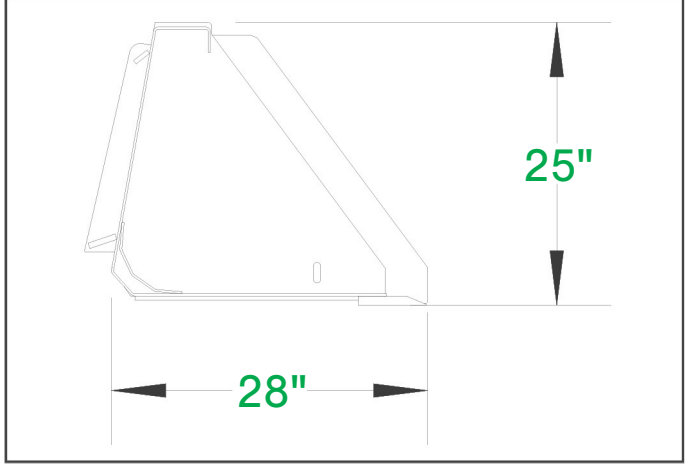

Heavy Duty Tractor Buckets 45 HP to 65 HP

- Higher back to prevent spillage
- Available sizes: 72”, 78", 84”
- Universal Skid Steer and many tractor style quick attach
- Features 3/16” Steel Sides and a 3/4” x 6” Cutting Edge
- X-treme Duty package offered (1/4" wrap 1" x 8" edge) 1/2" side edge & wear bars

Compact Tractor Buckets 45hp and Under


- Higher back to prevent spillage
- Available sizes: 66”, 72”
- niversal Skid Steer and many tractor styles quick attach
- Features 3/16” Steel Sides and a 1/2” x 4” Cutting Edge

X-treme Tractor Bucket
XTRAC84



The X-treme tractor bucket was designed for tractors with horse power of 65 and up. With a deep floor and a tall back this bucket has an oversized capacity. Rolled back makes for easy cleanout.

X-treme Tractor Bucket Specs

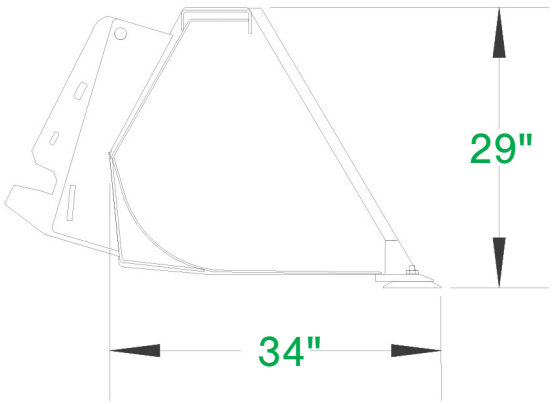

- **Higher back to prevent spillage**
- **Available sizes: 84"**
- **Universal Skid Steer and many tractor styles quick attach**
- **Features 3/16” Steel Sides and a 3/4” x 6” Cutting Edge**
- **Optional bolt on edge**

Rock Bucket CTRB48, CTRB60, CTRB66,CTRB72, SDVTRB72, SDVTRB78







- **Compact Tractor: 1/2" tine thickness, 2 3/4" spacing**
- **Compact Tractor rated for machines under 35 HP**
- **Compact available sizes: 48", 60", 66", 72"**
- **Standard Duty: 3/8" tine thickness, 3" spacing**
- **Standard Duty rated for machines 35-45 HP**
- **Standard available sizes: 72", 78"**

The IronCraft Compact Tractor and Standard Duty Rock Buckets offer a similar design to our X-treme version, but in a stepped down size for smaller machines. Easily sift through loose soil to remove unwanted rock and debris.

Compact Tractor Rock Bucket Specs

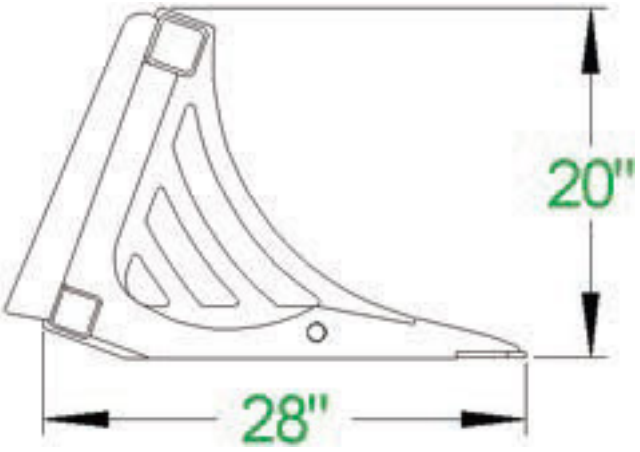


Standard Duty Rock Bucket Specs

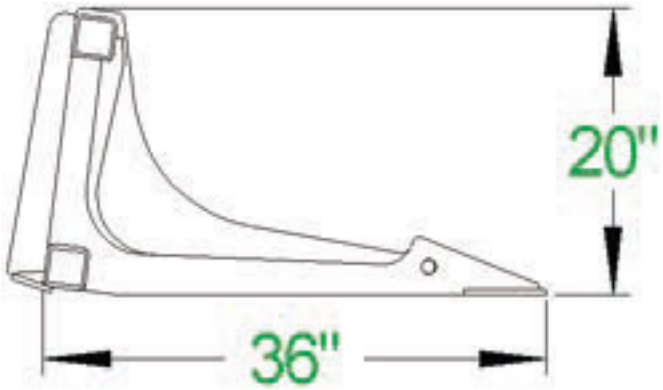

Rock Grapple



CTROKG60, CTROKG66, CTROKG72, SDROKGVT72, SDROKGVT78



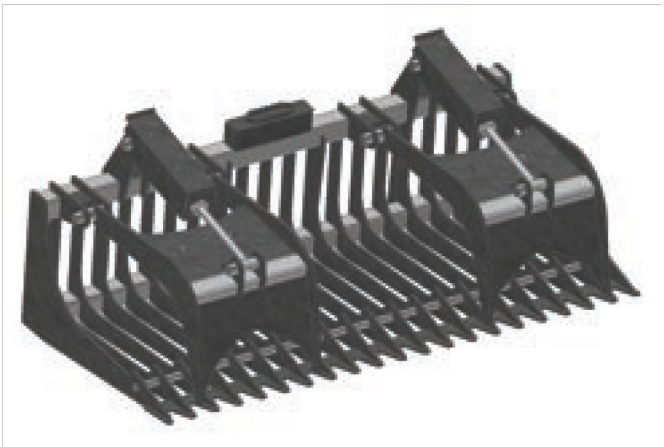

The IronCraft Rock Grapples are great for sifting through dirt in order to remove rocks and debris. Our Compact Tractor Rock Grapple comes with a single grapple, and works with 45 or less HP machines. The Standard Rock Grapple has dual cylinders and works with 45-60 HP machines.

- **Features 2" bore by 10" stroke cylinders**
- **Welded Front Teeth**
- **Compact Sizes available: 60", 66", 72"**
- **Standard Sizes available: 72", 78"**

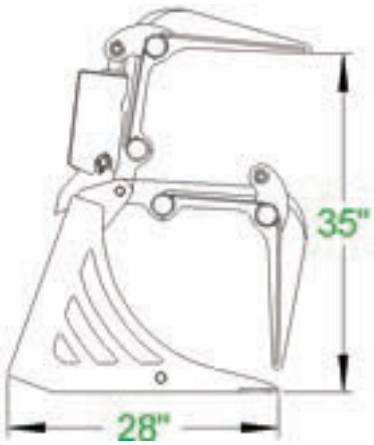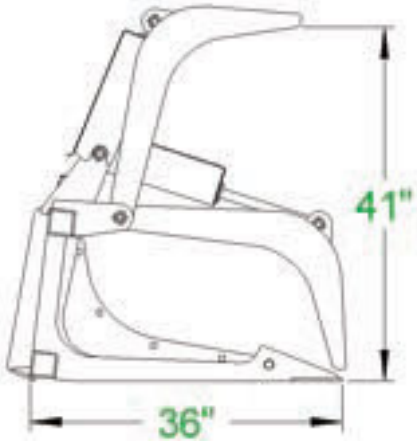Compact Tractor Rock Grapple Specs	Standard Duty Rock Grapple Specs
	


Root Grapples - SERG48, SERG60, SERG66, SERG72, ERG60, ERG66, ERG72, ERG78

Economy Root Grapples


- Designed for tractors up to 45hp
- 2” x 8” stroke cylinders
- Available sizes: 60", 66", 72", 78”
- 48" size is available for single cylinder SERG units.

Our economy single and dual cylinder grapples are ideal for moving small logs, brush, rocks, or just about any type of debris - leaving the dirt behind. The economy dual cylinder grapple is designed for tractors, allowing owners to get the full potential from their tractors. Dual grapples allow the operator the ability to handle uneven and odd-shaped material.

They come standard with twin 2” bore by 8" stroke cylinders, and are available in 60”, 66”, 72”, and 78” widths. The Economy Root Grapple opens up to 29".

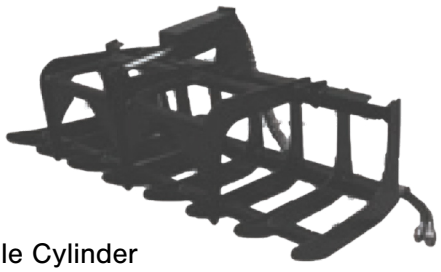


Single Cylinder

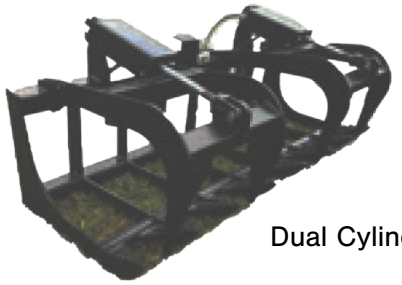

Dual Cylinder

Industrial Root Grapple

IRG66, IRG72, IRG78

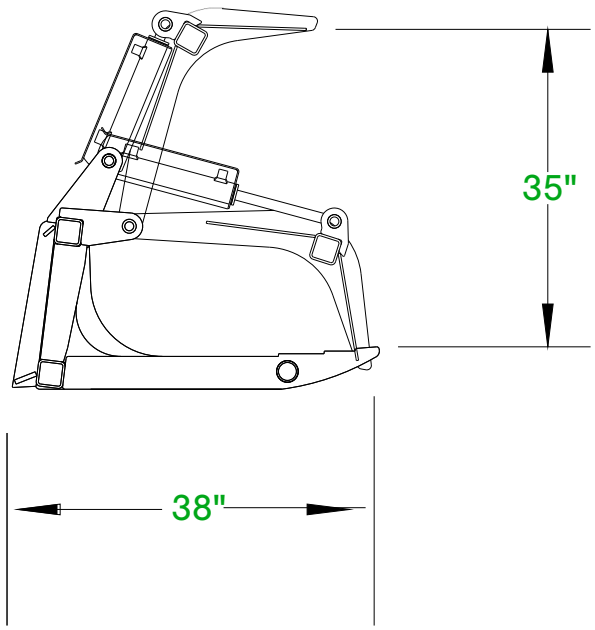

- Recommended machine size: 45HP to 65HP
- 2" bore by 10" stroke cylinders
- Hydraulic lines routed inside the tubing to prevent tears
- Available sizes: 66", 72", 78"

The Industrial Root Grapple is the grapple of choice for those who need an attachment that will hold up in severe applications. It can handle more material and is more rugged that our other grapples. It's built from 1/2" thick steel plate on the top and bottom, and incorporates 4" square tubing.




X-Treme Root Grapples

XRG72, XRG78, XRG84

X-treme Root Grapple

The X-treme Root Grapple is the grapple of choice for those who need an attachment that will hold up in severe applications. It can handle more material and is more rugged that our other grapples. It's built from 5/8" thick steel plate on the top, 1/2" on bottom, and incorporates 4" square tubing. It also features enclosed hydraulic cylinders and shafts.

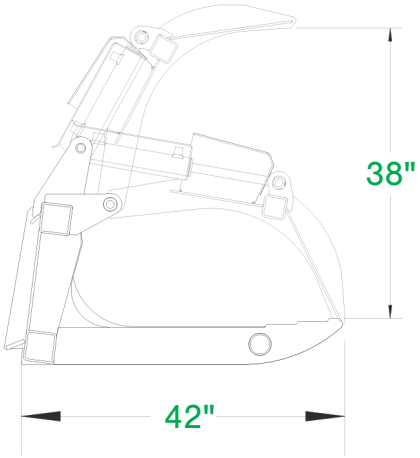

- **Recommended machine size: 65 HP and above**
- **2" bore by 10" stroke cylinders**
- **Hydraulic lines routed inside the tubing to prevent tears**
- **Available sizes: 72", 78", 84"**



Grapple Rakes
Compact Tractor / Economy / Standard


Our Grapple Rakes are ideal for raking and loading debris. The shape of the grapple makes it easy to roll debris into tight places.

- **Unique design makes it easy to roll debris into tight piles**
- **Compact Tractor Sizes: 48", 60", 66"**
- **Compact Tractor Dual Cylinder sizes: 60", 66"**
- **Economy sizes: 66", 72"**
- **Standard Duty sizes: 66" , 72"**

Compact Tractor Grapple Rake


Our Compact Tractor Grapple Rake is for use on tractors less than 40 HP. The Compact Tractor Grapple Rake is built heavy enough for rigorous use, but light enough for compact tractors. The Compact version is available in a single cylinder grapple 2x6 (48”, 60”, 66”) or a dual cylinder grapples 2x6 (60”, 66”).

CTGR48, CTGR60, CTGR66
CTGRDC60, CTGRDC66

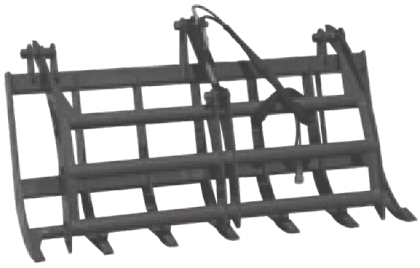

Single Cylinder

Opening Height of 42"




Dual Cylinder

Opening Height of 33"

Economy Grapple Rake

Our Economy Grapple Rake comes in 66" or 72" lengths, rated for machines up to 45 HP. The Economy Grapple Rakes are ready for the toughest jobs, built with top quality steel and 3000 psi rated tie-rod cylinders.

EGR66, EGR72

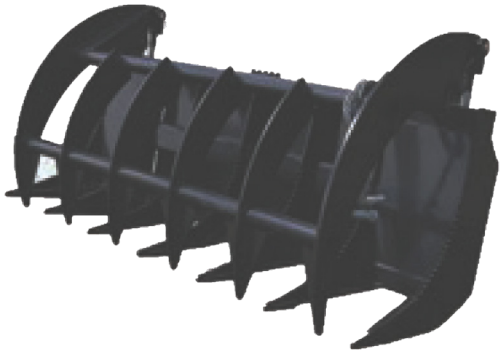

Standard Grapple Rake

Our re-designed Standard Duty Grapple Rakes are constructed from 3/8 AR400 Steel, and are rated for machines with 35-60 HP. The new design provides more strength, combined with a lower weight to maximize your grappling power.

ARSGR66, ARSGR72



Grapple Rakes

XGRT72, XGRT78, XGRT84


X-treme Grapple Rake



Our X-treme Grapple Rakes are ideal for raking up debris. The grapples can then be used to load the debris into a dump truck. The shape of the grapple rake makes it easy to roll debris into tight piles if you are planning to burn. We use twin 2" bore by 10" stroke cylinders, rated at 4,000 psi to handle the toughest jobs. Our X-treme Grapple Rakes are built with 1/2" top quality steel and come standard with 23 series teeth. Our X-treme Grapple Rakes have a full 51" opening. The X-treme is rated for 65+ HP machines.

- **Available as a single grapple**
- **Twin 2" bore by 10" stroke cylinders**
- **Unique design makes it easy to roll debris into tight piles**
- **X-treme sizes: 72", 78", 84"**

X-treme Grapple Rake Specs

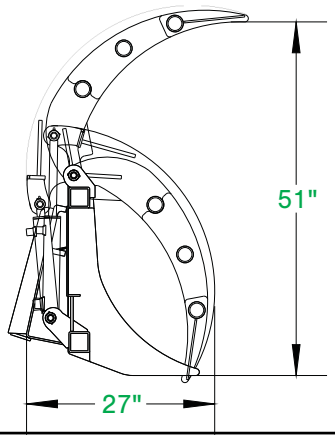

Hay Bale Equipment


XBS, HDBS, DHBABS

X-treme Hay Bale Squeezer

Our X-treme Bale Squeezer is great for anyone moving and stacking large quantities of hay. It features twin 2 1/2" x 8" cylinders with a holding capacity of 2,800 lbs. This attachment can also stack two bales at a time and handles 4, 5 or 6 foot bales.



- Twin 2 1/2X8 Cylinders
- 2800Lb Holding Capacity
- Will Lift 4',5', And 6' Bales

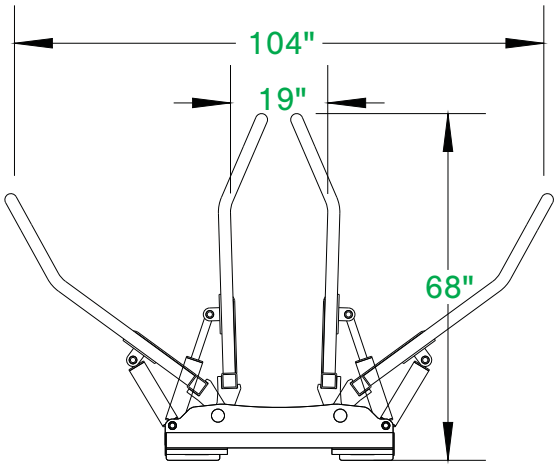


Heavy Duty Bale Squeezer

Easily grab and transport round bales with our heavy duty bale squeezer. You ca pick up bales sitting flat or on their side. The tubular design allows wrapped bal to be transported without tearing the plastic. The single cylinder design allo this attachment to be very economical



- Pick up bales sitting flat or on their side
- Single cylinder
- Very economical
- 65 hp and under
- 1800 LB Holding Capacity

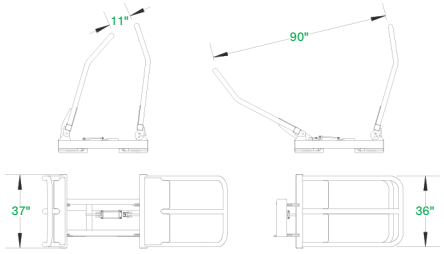


Double Adjustable Bale Spear

Our Double Adjustable Bale Spear is very useful around the farm. It can be adjusted to pick up 2, 4, 5, and 6 foot bales of hay, and is rated at 2,800 lbs. per spear.



- 2800Lb lifting capacity
- Designed to pick up 2- 4',5',and 6' bales
- Spears are adjustable

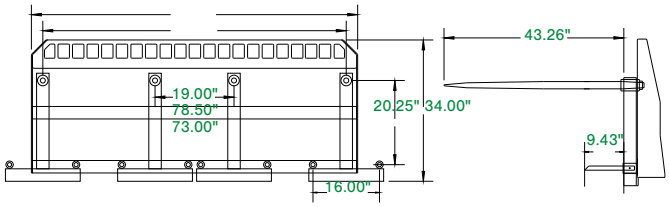

Low Back Hay Spears

Our Hay Spear is an excellent piece of equipment to have on the farm. Easily move bales of hay with a quick hook up on your skid steer or tractor. The Hay Spear is rated at 2,800 lbs. The selection will be a fixed spacing, non-adjustable. Euro Style and John Deere mounts are available.

- 2,800 lb weight rating
- Euro style and John Deere mounts available
- Spear length 48" overall

Single Hay Spear

LBHS



Double Hay Spear

DLBHS



Triple Hay Spear

TLBHS





Economy Hay Spear


ECHS



Hay Spear Specs



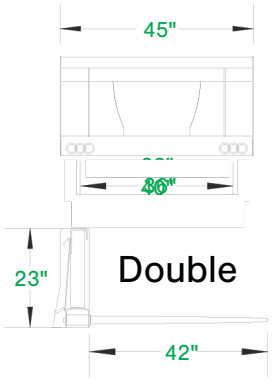

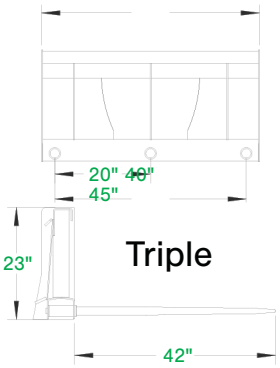

High Back Hay Spears

Single High Back Hay Spear **HBHS**



Double High Back Hay Spear

DHBHS




Triple High Back Hay Spear **THBHS**





Our High Back Hay Spear is designed to increase your leverage and safety when rolling the bales back towards the cab. Hay Spears easily move bales of hay with a quick hook up on your skid steer or tractor.

- **2,800 lb weight rating**
- **Euro Style and John Deere mounts available**
- **High back increases leverage and safety**

Hay Spear Specs

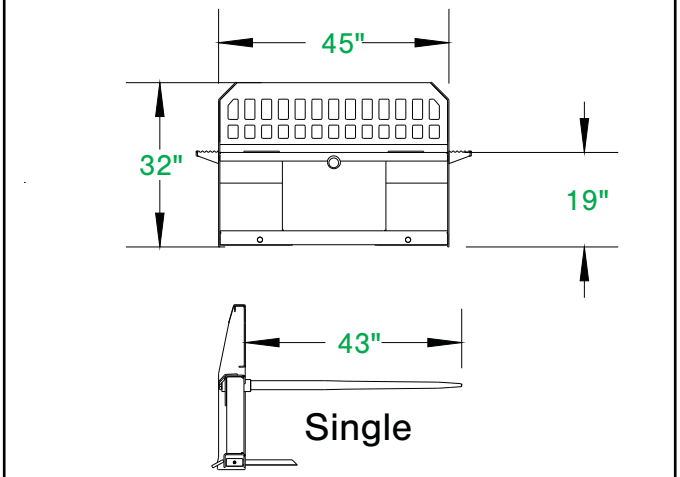


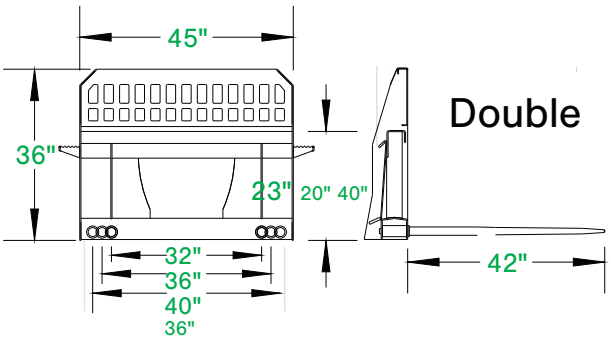

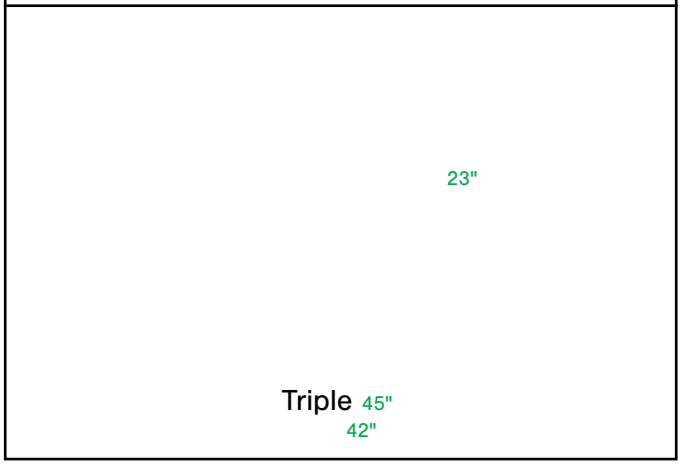

Hay Grapple Bucket


HBGB84, HBGB96

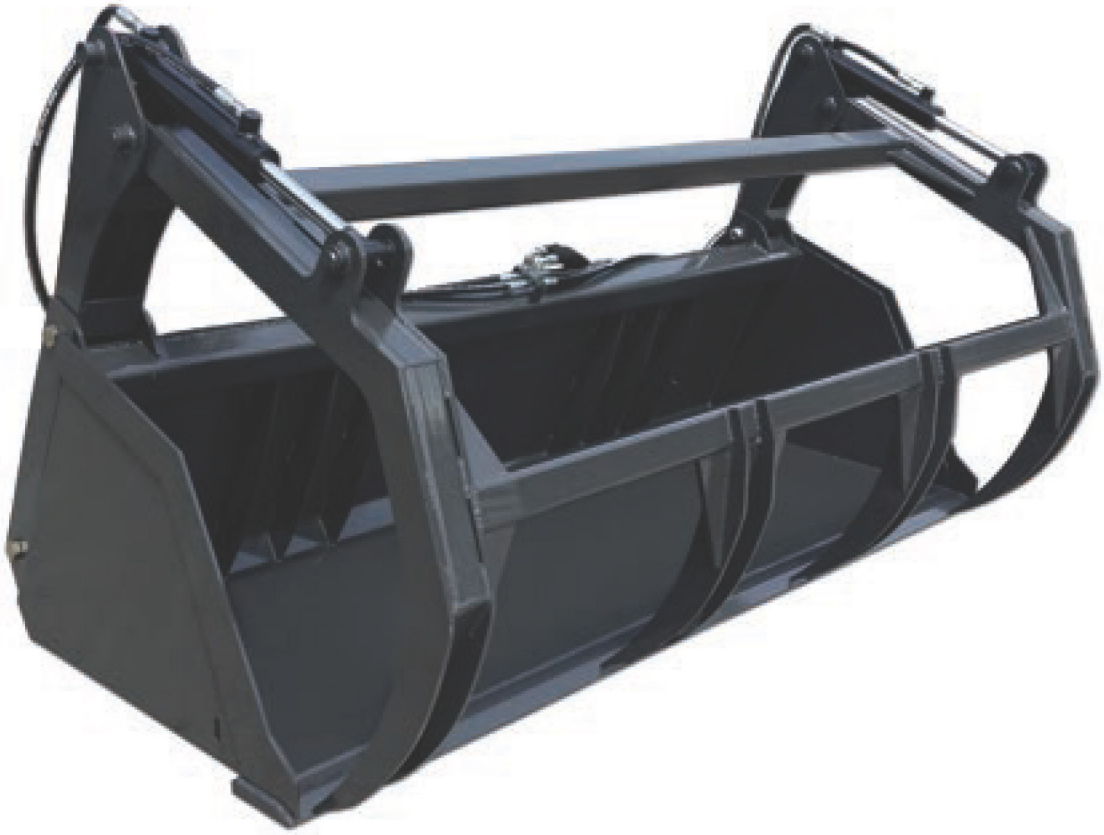

Our Hay Grapple Bucket is a large capacity bucket with a grapple. Used for gathering broken bales of hay, straw, silage and other light material.

- 1/4 wrap , 3/4 x 6 cutting edge
- 2 x 10 cylinders Grease fittings at every hinge point
- Available in 84" & 96"

Hay Grapple Bucket Specs

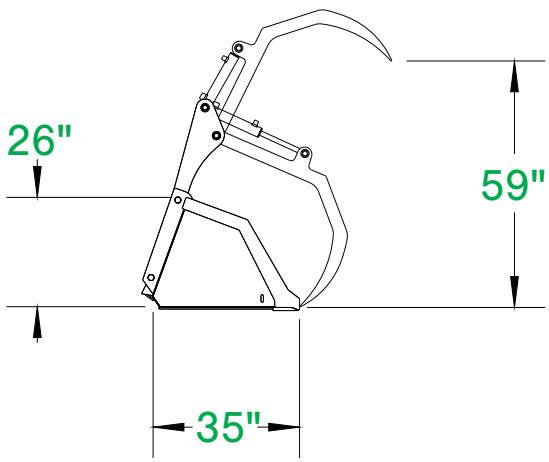

Hay Accumulator Grapple


HAG10



The Accumulator Grapple allows one man and a skid steer to gather 8 to 10 square bales, grapple them, lift and off load to a trailer. No need for multiple pieces of equipment, this is all operated from inside the skid steer using the Accumulator Grapple.

- **2 x 6 cylinder**
- **9” grapple hooks**
- **Radial bearings**
- **10 bale capacity**
- **Adjustable width sides**


Hay Accumulator Grapple Specs

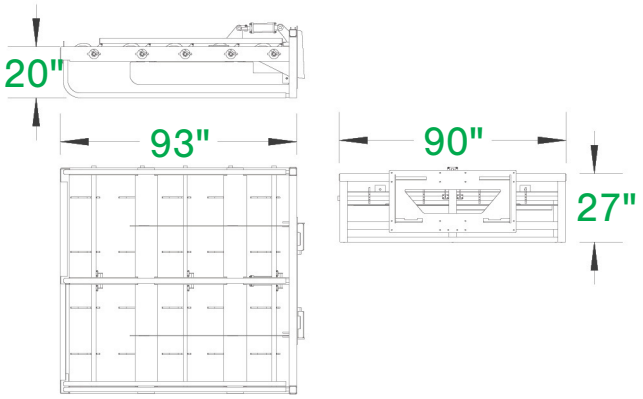

Manure Forks

CTMF72, XMF84


These forks are useful for manure and general pick up of materials when you only want to pick up the item and not the soil around it. The tines slide in through the front and are pinned from the rear.

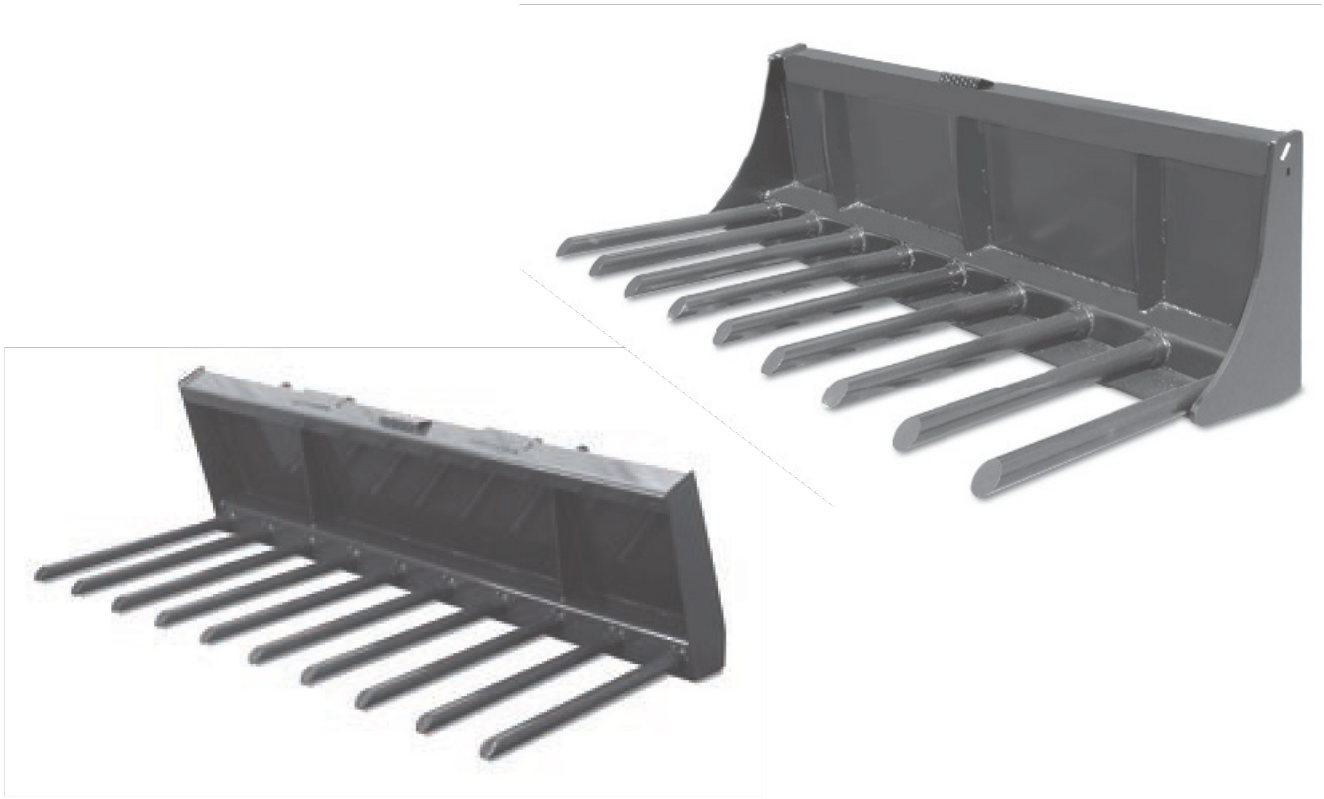


- **Recommended for machines under 55 HP**
- **1–1/2" cold rolled steel tines**
- **Available sizes: 72"**

- **Strong 2" cold rolled steel tines**
- **Available sizes: 84"**
- **Recommended for machines above 55 HP**

Compact Tractor Manure Fork Specs

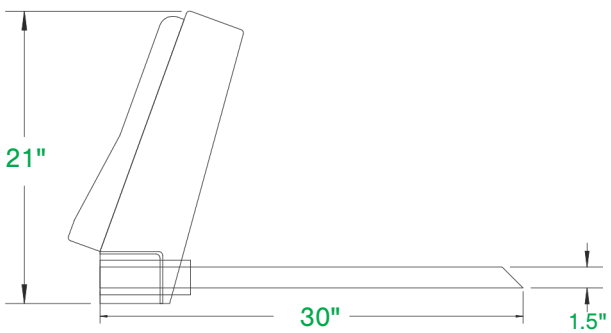

X-treme Manure Fork Specs

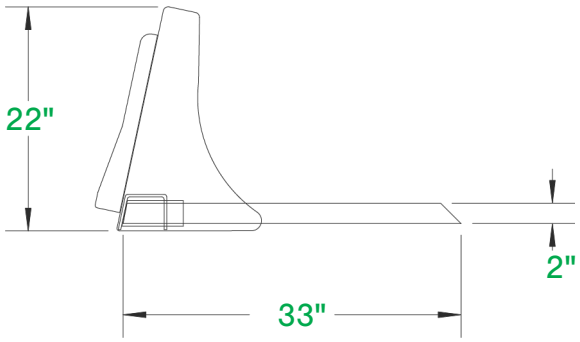


Sub-Compact Pallet Forks & Frame
SCTFF



The IronCraft Sub-Compact Pallet Forks are ideal for machines with limited lifting capacity. Similar to our compact tractor pallet forks, but using a class 1 fork to remove additional weight, without compromising strength. Fork tines come in 42" lengths.

- **3/8" Formed top slide**
- **2" x 3/8" Center slide support**
- **Open flat bar grill**
- **1000 lb. load capacity**

Sub-Compact Pallet Forks & Frame Specs

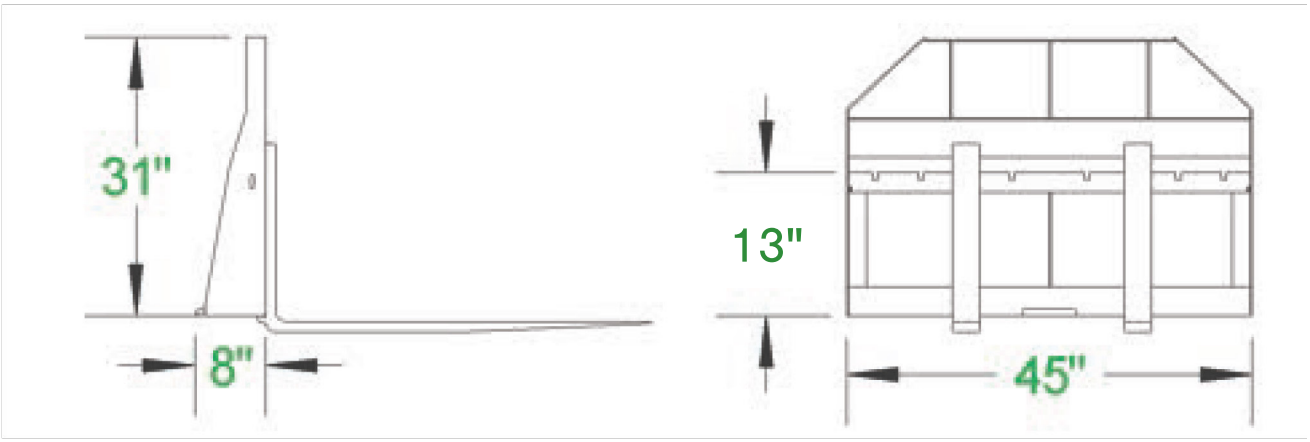

Pallet Forks & Frame

CTFF
Compact Tractor Pallet Forks & Frame

IronCraft Compact Tractor pallet forks are designed specifically for compact tractors. Our lightweight frame offers a 2000 load capacity. Fork tines are 1 3/16" thick, 3" wide, and available in 48" lengths. Hooking up is fast and convenient, and our see-through visibility makes tine placement easy.





- 2000 lb. load capacity
- 48" tines available
- John Deere mounts are available

SDFF
Standard Duty Pallet Forks & Frame

Anyone that owns a skid steer should have a set of forks on hand. Forks are ideal for lifting pallets, loading lumber or just about anything else. Our forks are 1–1/4 inches thick, 4 inches wide and 42 inches long. They are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab. Euro Style and John Deere mounts are available.



- Rated to carry 4,000 lbs.
- Steps on both sides of frame
- Euro style and John Deere mounts available
- 48" tines available

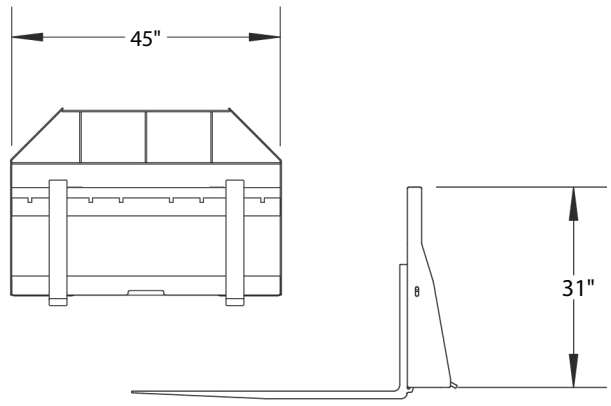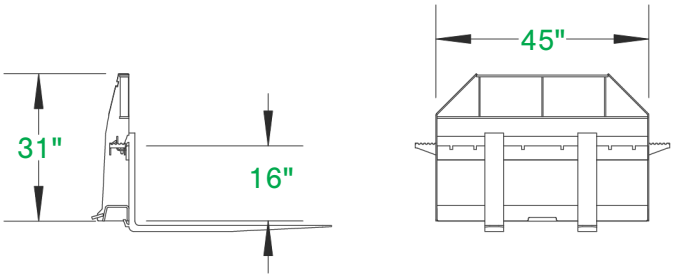Compact Tractor Pallet Forks & Frame Specs	Standard Duty Pallet Forks & Frame Specs
	

Heavy Duty Pallet Forks & Frame


HDFF




Anyone that owns a skid steer should have a set of forks on hand. Forks are ideal for lifting pallets, loading lumber or just about anything else. Our forks are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab. Euro Style and John Deere mounts are available.

- **Rated to carry 4,000 lbs.**
- **Steps on both sides of frame**
- **Euro style and John Deere mounts available**
- **48" tines**

Heavy Duty Pallet Forks & Frame Specs

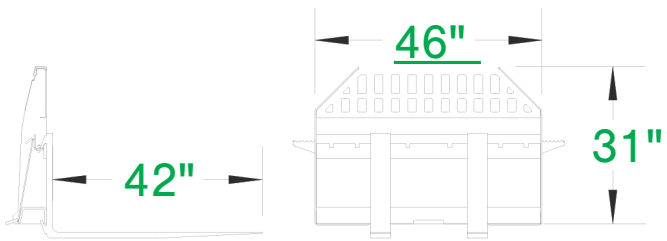


Skid Steer Conversion QTSS, JD234TSS, JD500TSS, SSTQ

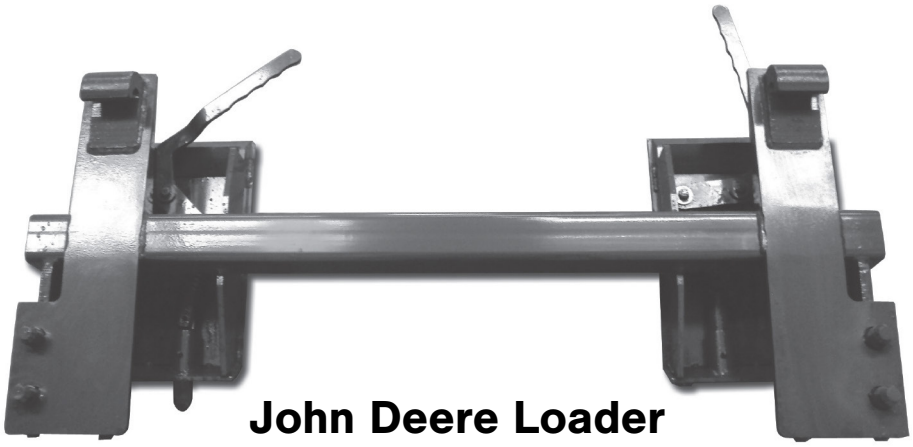

John Deere Loader




Euro Loader

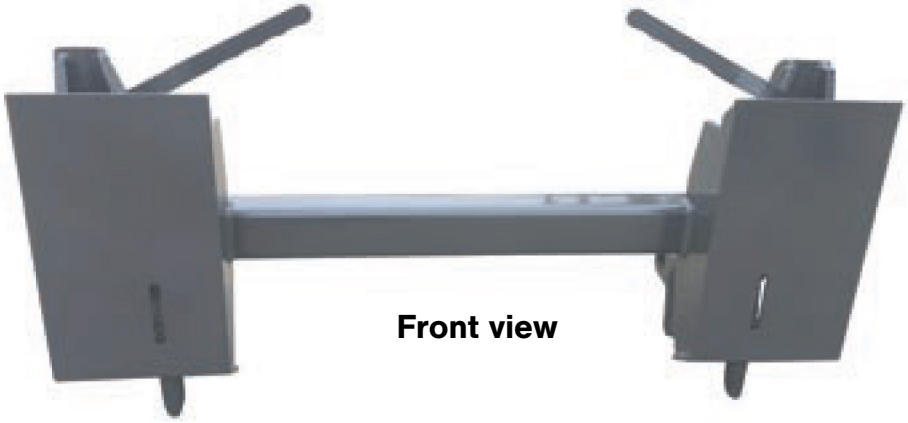

Front view

Snow Plow

CTSPLOW72, CTSPLOW84, CTSPLOWM60, CTSPLOWM72, HDSPLOW72, HDSPLOW84, HDSPLOW96, HDSPLOW108

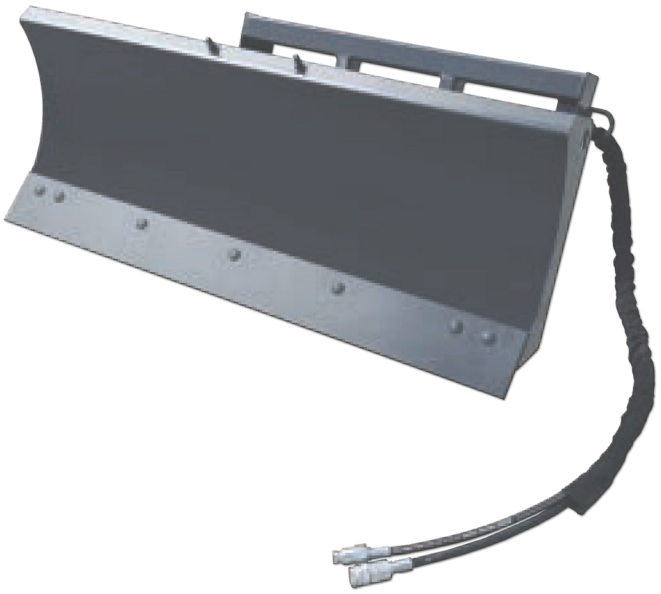

Our Compact Tractor Snow Plow allows you to quickly clear driveways and parking lots. This plow is designed for compact tractors under 45 HP. Easily angle the plow with the 2" x 6" hydraulic cylinder.


- **Designed for compact tractors**
- **Available in manual angle**
- **2" x 6" hydraulic cylinder**
- **Available sizes: 60", 72", 84"**
- **Angles to 30 degrees both ways**




Our Heavy Duty Snow Plow is the same basic design of our X-treme Snow plow but without the extra roll top. This design allows the operator to have better visibility while plowing.

- **Easily angle the plow from inside the cab**
- **3" x 6" hydraulic cylinder**
- **1/2" AR400 bolt on cutting edge**
- **Adjustable skid shoe**
- **Available sizes: 72", 84", 96", 108"**
- **Angles to 30 degrees both ways**

Compact Tractor Snow Plow Specs

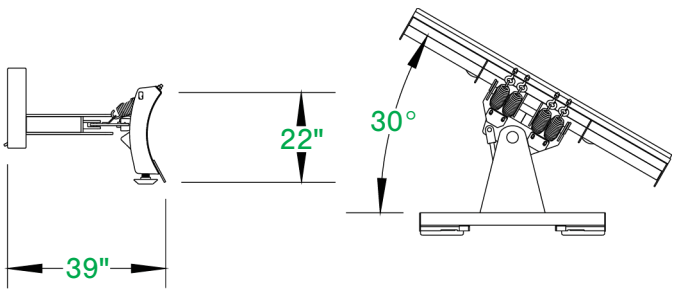

Heavy Duty Snow Plow Specs

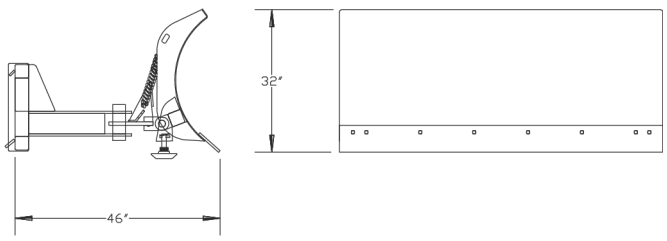


Snow Pushers

Compact Tractor Snow Pusher


Our Compact Tractor Snow pusher is a smaller version of our full size pusher, allowing you to get to areas a large machine could not reach. The low profile design offers greater visibility for small tractors and mini skid steers. Available in 48", 60", 72", and 84" sizes

CTSPUSH48
CTSPUSH60
CTSPUSH72
CTSPUSH84

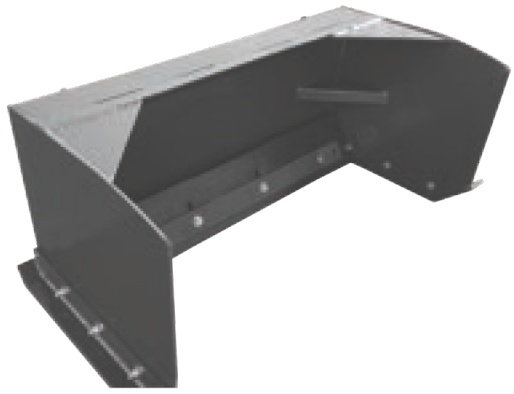

- **1–1/2" x 8" replaceable rubber edge**
- **½" AR400 replaceable shoes**
- **5/16" sides**
- **Optional pull back**


Compact Tractor Snow Pusher Specs

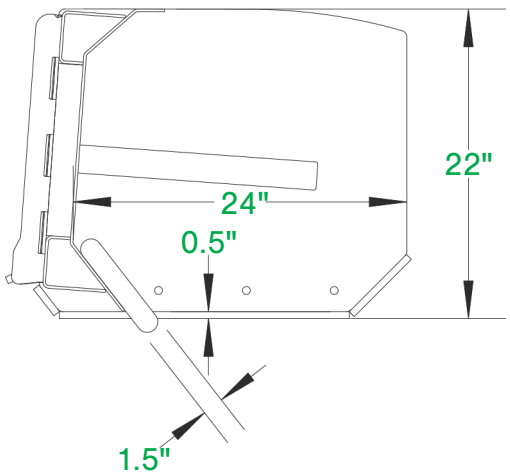

Universal Skid Steer Quick Attach

QAPLT, QAPLT3/8

With the IronCraft Universal Skid Steer Quick Attach plate, you can easily convert your existing attachment to the universal skid steer hook up. Simply weld or bolt the quick attach plate to the implement you wish to convert. Our standard quick attach steel plates are 1/4" thick and are solid across the back. We can also make the steel plates thicker for different applications.

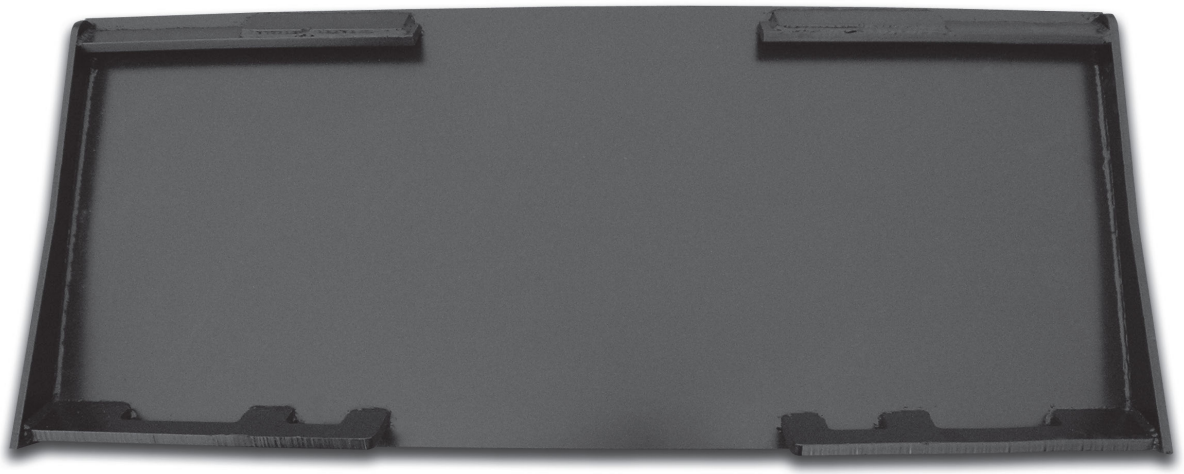

3/8" available

Tree & Post Puller


TPP



This versatile puller will pull posts up to 8" in diameter and trees up to 6" in diameter. It allows you to pull up unwanted trees and shrubs without having to dig around the roots.

- **Pull posts up to 8" in diameter and trees up to 6" in diameter**
- **2–1/2" x 8" cylinder**

Tree & Post Puller Specs

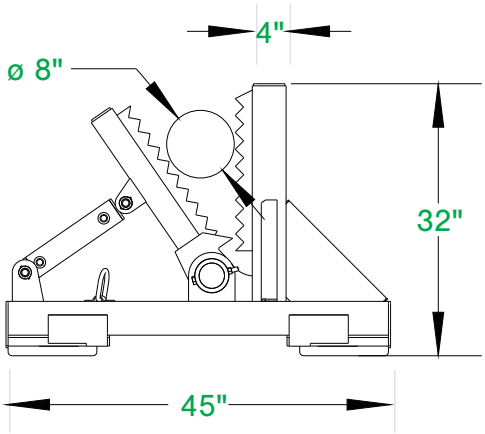


Heavy Duty Stump Bucket

The Heavy Duty Stump Bucket is an excellent addition to your skid steer attachments. Easily dig around the stump, and then pop it out. We have even had contractors dig house footings with the stump bucket. These stump buckets will enable you to be more versatile in your contracting needs. The Heavy Duty Stump Bucket is designed for machines with HP of 65 or below.



- **Great for stump removal and digging footings**
  - **3/8" sides 3/4" x 6" edge**
  - **3" x 3/8" Wear bars**

Heavy Duty Stump Bucket Specs

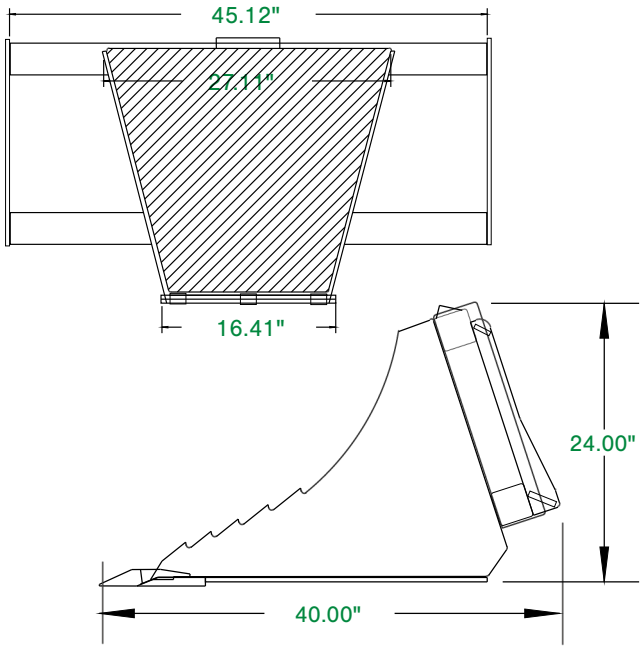

Standard Duty Brush Cutters
SBC60, SBC72




Standard Low Flow Brush Cutter
14 – 20 GPM


- 3" cutting capacity
- 3/16" deck with 3/8" A36 reinforced sides
- 40HP right angle gear box
- 2 blades with stump jumper
- High torque motor with built in relief valve
- Does not require a case drain

Our Standard Duty Brush Cutter comes with a 60" or 72" mowing deck. It features 2 blades, a 40HP gear box and stump jumper. A flow of 11–20 gpm is required. Optional mesh grill available on open front. The one year warranty does not cover the blades or hoses. (Please see page 95 of the catalog for full warranty).

Standard Low Flow Brush Cutter Specs

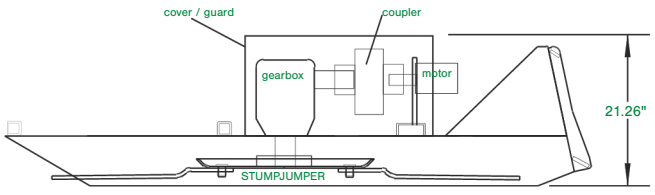

Open Front

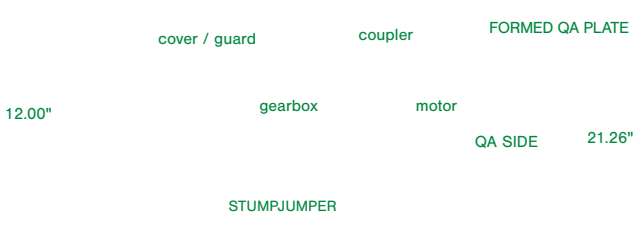

SNOW CANNON SERIES
TRACTOR SNOW BLOWER

IronCraft snowblowers are designed with a durable performance and high capacity design to easily catapult snow away from driveways, parking lots and roads. The IronCraft Snow Cannon has three choices of widths ranging in required horsepower from 15-50.

QUICK FEATURES

- 3 Point Hitch / Quick Hitch compatible.
- Welded Augers with High Tensile Steel Ribbon Flighting
- Five blade fan evacuates high volumes of snow quickly, and adds tighter tolerance to the housing.
- Heavy-duty gear box.
- Manual Pin-Style Deflector to set it and forget it.
- Adjustable skid shoes to extend cutting edge life.




MANUAL DEFLECTOR

All IronCraft Snow Cannons come with a manual pin style deflector allowing a true set it and forget it approach to blowing snow.



HIGH TENSILE STEEL RIBBON FLIGHTING


To deliver even the heaviest wet snow to the awaiting fan, IronCraft Snow Cannons use machine formed hand welded augers made with high tensile steel ribbon flighting to provide strength and durability for years to come.

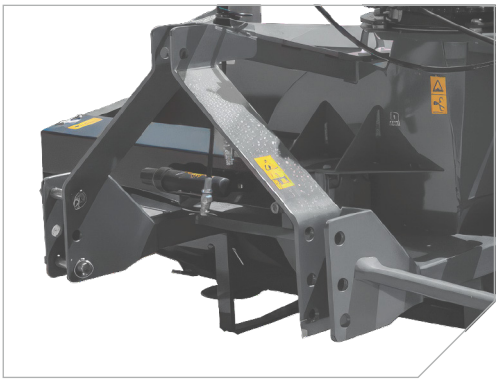

3PT/QUICK ATTACH


All single auger PTO driven models are built for Category 1 or Category 2 type 3PH. All models are Quick Attach Compatible.

	SCS-54"	SCS-68"	SCS-78"
TRACTOR HP	15 HP	30 HP	50 HP
WORKING WIDTH	54 in	68 in	78 in
CHUTE ROTATION	Manual	Manual	Manual / Hydraulic
TPL MOUNT	Cat 1	Cat 1	Cat 1 & 2
WEIGHT	366 lbs	506 lbs	748 lbs

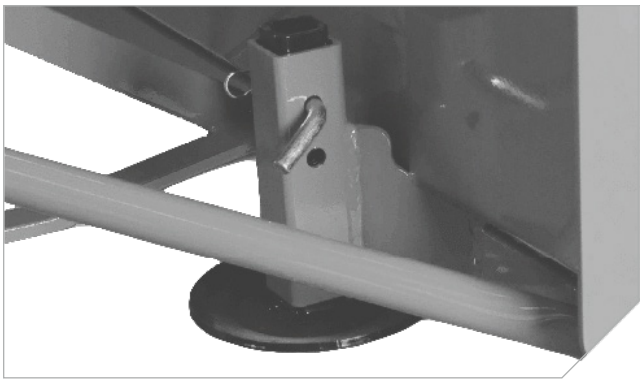


SKID SHOES & RAILS

IronCraft Snow Cannons come equipped with adjustable skid shoes extending the life of the cutting edge and helping to protect surfaces from damage commonly associated with snow removal.

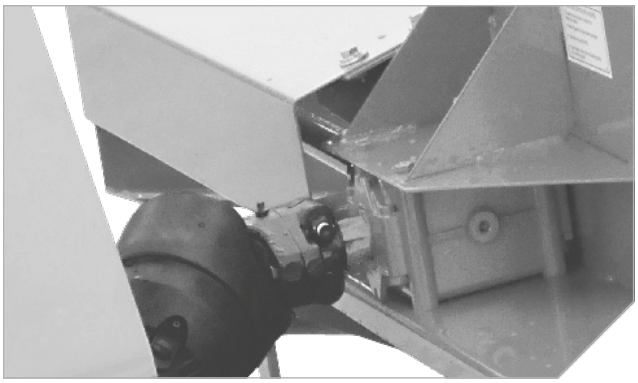


GEAR BOX

Heavy Duty gear boxes transfer the power from the tractor into the driveline of the Snow Cannon, ensuring consistent power input to the auger and fan assemblies.

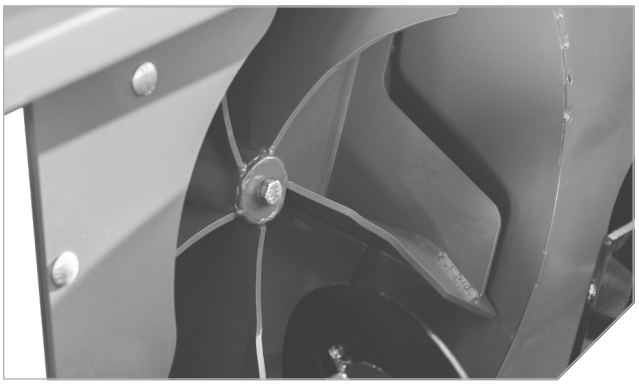


FIVE BLADE FAN

All IronCraft Snow Cannons now feature a standard 5 blade fan. The five blades not only evacuate high volumes of snow quickly, but also feature tighter tolerance to the housing increasing velocity of the snow exiting the chute.

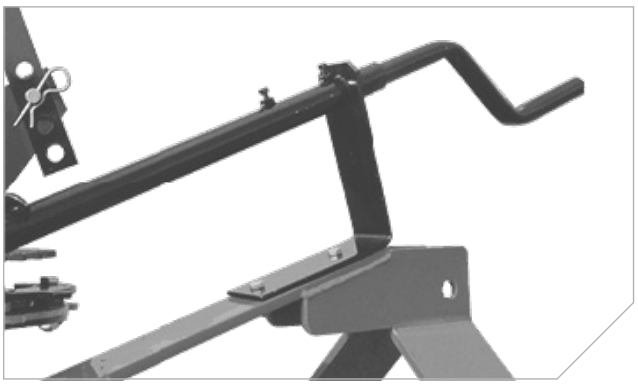

MANUAL ROTATOR

Manual rotators are standard on all IronCraft Snow Cannons and can be optionally outfitted on most models where operators can safely reach the adjustment handle.

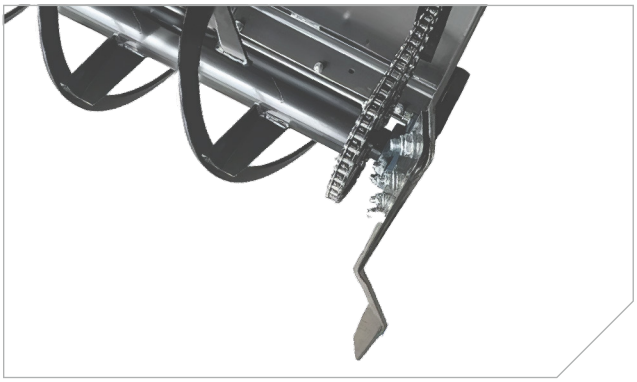

WING BITS

Heavy Duty Wing Bits increase the width of the Snow Cannon for more snow processing.

OPTIONAL UPGRADE

HYDRAULIC ROTATOR

Choose an optional hydraulic rotator upgrade for a hands-off approach to chute rotation.

An optional hydraulic rotator is the ideal upgrade for tractors with cabs or operators making frequent adjustments.





Warranty

LIMITED WARRANTY

IronCraft products are warranted to be free from defects in workmanship or materials for a period of (12) months from initial sale, lease or rental date.

FORESTRY DISC MULCHER

For more info on our disc warranty please refer to our disc operating manual. For warranty info on all other components on the forestry disc mulcher please refer to the IronCraft operator's manual.

NON-COVERED ITEMS

- This warranty does not cover normal wear items, including but not limited to, bearings, hoses, ground engaging parts such as, teeth, blades, cutting edges, pilot bits, auger teeth and broom bristles.
- This warranty does not cover maintenance, service or adjustments.
- This warranty does not cover damage due to misuse, negligence, accidents, or improper maintenance.
- This warranty does not cover damage due to improper application, installation, adjustment or setup.
- This warranty does not cover improper modifications of product.
- This warranty is void if any components have been disassembled, i.e. pumps, gear boxes, motors.
- Specially modified attachments built by IronCraft Attachments to meet your customer's needs shall not be warrantied by Construction Implements Depot, Inc.
- This warranty does not cover replacement parts not supplied by CID, Inc.

WARRANTY STATEMENT

Our obligation under this Limited Warranty shall be solely limited to repairing or replacing any part (see non-covered items) free of charge that, according to our judgment, shows evidence of a defect in quality of workmanship or materials for the stated (12) month warranty period. All defective parts must be routed directly to IronCraft with freight or delivery charges to be prepaid. This Limited Warranty shall not be interpreted to render IronCraft liable for any injury or damage to persons, business or property of any kind nor expenses or losses incurred for labor, supplies, substitute machinery rental, or for any other reason. Repair or replacement parts are subject to the supply conditions at the time of repair or replacement, which may directly affect our ability to obtain material and/or replacements parts. IronCraft reserves the right to make improvements in design or changes in specifications at any time without incurring any obligations to owners of previously purchased units. No one but IronCraft is allowed to alter, modify or enlarge this warranty nor the exclusions, limitation and reservation at any time.

Warranty Service

Procedures for Obtaining Warranty Service

RGA (Returning Goods Authorization) Policy:

If repairs are required, IronCraft must obtain a RGA number from the Manufacturer of the defective part and proof of purchase. RGA and services are rendered by IronCraft only. Any responsibility of shipping costs on any item returned for repair is at the discretion of IronCraft . All returned parts must have a RGA number written clearly on the outside of the package along with a Service Request Form and the defective part. No COD packages will be accepted. No package will be accepted without a RGA number written on the outside of the package. RGA numbers are only valid for 30 days from the date of issue. All replacement parts shipped out will need a PO# from the original IronCraft customer. If the Defective part is rendered non-warranty the PO# will be invoiced for the replacement part.. Should you have any problems with your Attachments, please follow these procedures to obtain the service:

1. Call the Warranty Department (336) 859-2002 ext 215. Photo's serial and model #'s of the attachment and parts in question will need to be obtained with a description of the problem.
2. Upon a warranted issue Go to ironcraftattachments.com, click on the warranty tab and fill in the warranty claim form. IronCraft will retain a RGA# from the manufacturer of the defective part. If all information above is fulfilled the manufacturer will issue a RGA#
3. A PO# is required from the original IronCraft customer. PO#'s will only be invoiced in the event that the defective part is un-warranted.
4. IronCraft will ship a replacement part with a service request form and RGA #. There will be a call tag with the Manufactures address and instructions for returning the defective part.
5. Once the defective part is warranted by the manufacturer. IronCraft will be issued a credit and the PO# will be void. If the manufacturer finds that the defective part is not warranted the PO# will be invoiced for the replacement part.
6. In the event that renders the attachment be returned to IronCraft for repair, IronCraft will make arrangements for pick up and return. Repairs will be performed by IronCraft qualified technicians. Non-warranted issues will be discussed and repairs will be performed upon agreement of the owner, and payment for parts and labor will be issued.

NOTES

NOTES


WITH OVER 600

IMPLEMENTS & ATTACHMENTS,

IRONCRAFT

HAS YOU COVERED.

FIND YOUR NEAREST IRONCRAFT DEALER AT
WWW.IRONCRAFTUSA.COM/DEALER-LOCATOR

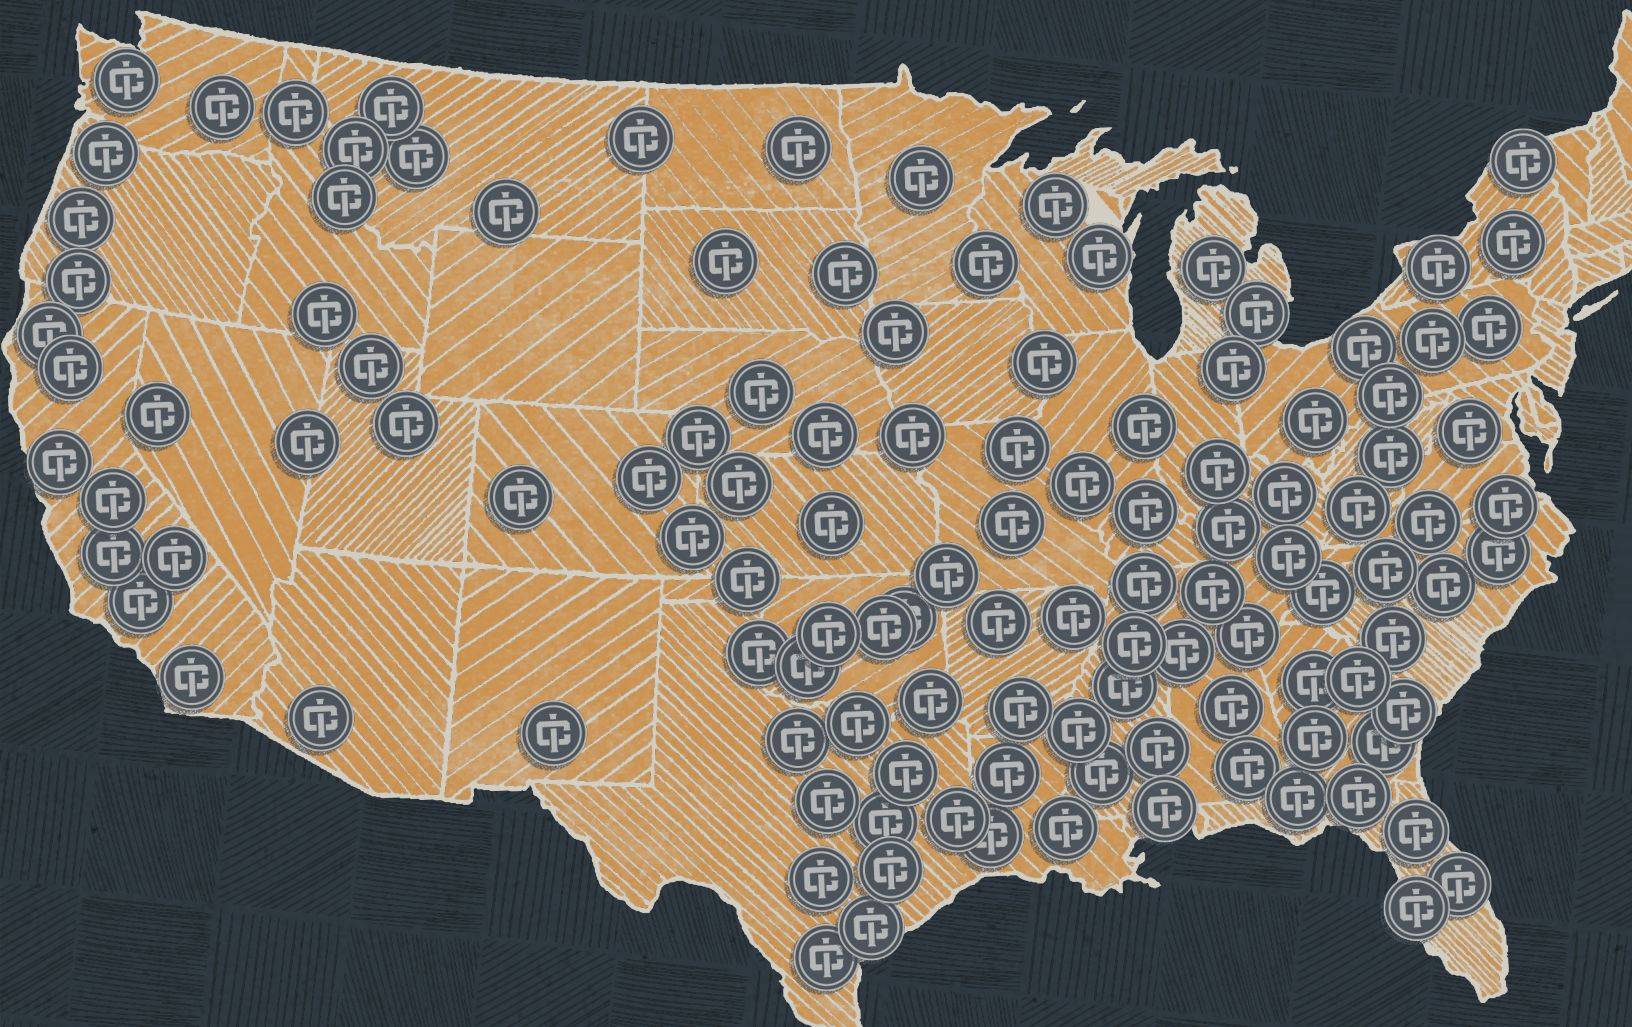


IRONCRAFT

7 ROCKY MT RD
Athens, Tennessee
37303

(P) 423-405-5150 (F)
423-405-5904
WWW.IRONCRAFTUSA.COM

FARM EQUIPMENT MANUFACTURERS ASSOCIATION
FEMA

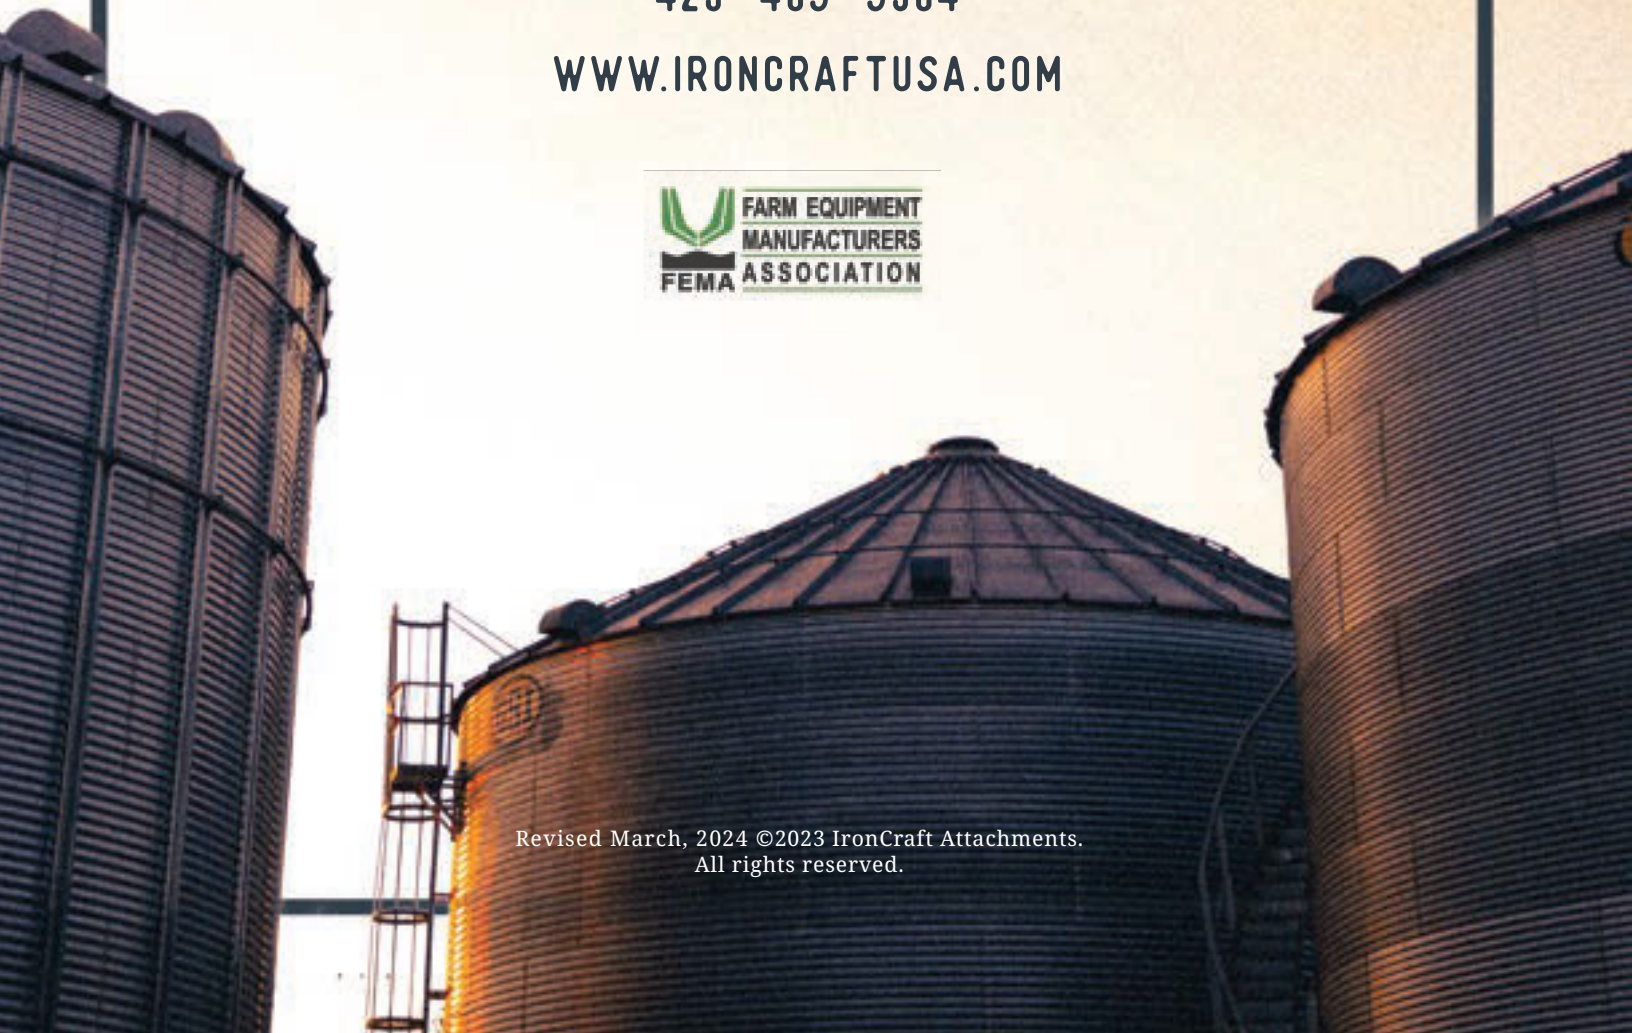

Revised March, 2024 ©2023 IronCraft Attachments.
All rights reserved.